## DATASHEET - NZMS3-MX350



NZM3 PXR20 circuit breaker, 350A, 3p, screw terminal



Part no. Catalog No.

NZMS3-MX350 191499



Similar to illustration

#### **Delivery program**

source) program			
Product range			Circuit-breaker
Protective function			Motor protection
			IE3 🗸
Standard/Approval			IEC
Installation type			Fixed
Release system			Electronic release
Construction size			NZM3
Description			IEC/EN 60947-2 with characteristic conforming to IEC/EN 60947-4-1 with phase failure sensitivity The circuit-breaker fulfills all requirements for AC-3 switching category. R.m.s. value measurement and "thermal memory" Adjustable time delay setting to overcome current peaks tr at 6 x Ir also infinity (without evolved or leagesce)
			(without overload releases) All AC-3 rating data applies to direct switching by the circuit-breaker under normal operating conditions. If, for example, a contactor takes over AC-3 switching under normal operating conditions, the full rated uninterrupted current applies to the circuit-breaker, In = Iu.
Number of poles			3 pole
Standard equipment			Screw connection
Switching capacity			
400/415 V 50 Hz	I <sub>cu</sub>	kA	70
Rated current = rated uninterrupted current	$I_n = I_u$	А	350
Setting range			
Overload trip			
L	١r	A	140 - 350
Short-circuit releases			
Non-delayed	$I_i = I_n \mathbf{x} \dots$		2 – 15
Motor rating AC-3 50/60 Hz			
380 V 400 V	Р	kW	200
660 V 690 V	Р	kW	315
Motor rating AC-3 50/60 Hz			
400 V	Р	kW	200
660 V 690 V	Р	kW	315
Rated operational current AC-3 50/60 Hz			
400 V	l <sub>e</sub>	А	349

#### **Technical data** General IEC/EN 60947 Standards Protection against direct contact Finger and back of hand proof to VDE 0106 Part 100 Climatic proofing Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 Ambient temperature Ambient temperature, storage °C - 40 - + 70 °C -25 - +70 Operation 20 (half-sinusoidal shock 20 ms) Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC g 60068-2-27 Safe isolation to EN 61140 V AC Between auxiliary contacts and main contacts 500 V AC between the auxiliary contacts 300 Vertical and 90° in all directions Mounting position With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° right/left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions Direction of incoming supply as required Degree of protection In the operating controls area: IP20 (basic degree of protection) Device Enclosures With insulating surround: IP40 With door coupling rotary handle: IP66 Terminations Tunnel terminal: IP10 Phase isolator and strip terminal: IP00 Other technical data (sheet catalogue) Temperature dependency, Derating **Circuit-breakers** Rated current = rated uninterrupted current $I_n = I_u$ А 350 U<sub>imp</sub> Rated surge voltage invariability v 8000 Main contacts Auxiliary contacts v 6000 Rated operational voltage Ue V AC 690 111/3 Overvoltage category/pollution degree Ui v 690 Rated insulation voltage Use in unearthed supply systems v ≦ 690 Switching capacity Rated short-circuit making capacity I<sub>cm</sub> 240 V kΑ 220 $I_{cm}$ 400/415 V kΑ 154 I<sub>cm</sub> 440 V 50/60 Hz $I_{cm}$ kΑ 143 525 V 50/60 Hz 80 kΑ $I_{cm}$ 690 V 50/60 H lc kΑ 50 Rated short-circuit breaking capacity I<sub>cn</sub> I<sub>cn</sub> Icu to IEC/EN 60947 test cycle O-t-CO lcu kΑ 240 V 50/60 Hz kΑ 100 I<sub>cu</sub> 400/415 V 50/60 Hz kΑ 70 I<sub>cu</sub> 440 V 50/60 Hz kΑ 65

525 V 50/60 Hz

690 V 50/60 Hz

240 V 50/60 Hz

Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0

kΑ

kΑ

kΑ

kΑ

36

25

100

I<sub>cu</sub>

Icu

I<sub>cu</sub>

lcs

 $I_{cs}$ 

400/415 V 50/60 Hz	I <sub>cs</sub>	kA	70
440 V 50/60 Hz	I <sub>cs</sub>	kA	65
525 V 50/60 Hz	I <sub>cs</sub>	kA	18
690 V 50/60 Hz	I <sub>cs</sub>	kA	6
	.cs		Maximum back-up fuse, if the expected short-circuit currents at the installation
ated short-time withstand current			location exceed the switching capacity of the circuit-breaker.
t = 0.3 s		۲A	22
	I <sub>cw</sub>	kA	3.3
t=1 s	I <sub>cw</sub>	kA	3.3
tilization category to IEC/EN 60947-2			А
ifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)	Operations		15000
ifespan, electrical			
AC-1			
400 V 50/60 Hz	Operations		5000
415 V 50/60 Hz	Operations		5000
690 V 50/60 Hz	Operations		3000
AC3			
400 V 50/60 Hz	Operations		2000
415 V 50/60 Hz	Operations		2000
690 V 50/60 Hz	Operations		2000
Max. operating frequency		Ops/h	60
otal break time at short-circuit		ms	< 10
erminal capacity			<b>a</b>
tandard equipment			Screw connection
ptional accessories			Box terminal Tunnel terminal connection on rear
ound copper conductor			
Box terminal			
Solid		mm <sup>2</sup>	2 x 16
Stranded		mm <sup>2</sup>	1 x (35 - 240) 2 x (25-120)
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
		mm	
Stranded		2	4 (40, 405)
1-hole		mm <sup>2</sup>	1 x (16 - 185)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm <sup>2</sup>	1 x 16 2 x 16
Stranded		mm <sup>2</sup>	1 x (25 - 240) 2 x (25 - 240)
Connection width extension		mm <sup>2</sup>	
Connection width extension		mm <sup>2</sup>	2 x 300
I circular conductor			
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
Stranded			
Stranded		2	( (m (m) <sup>2</sup> )
		mm <sup>2</sup>	1 x (25 - 185) <sup>2)</sup>
Double hole		mm <sup>2</sup>	1 × (50 - 240) 2 × (50 - 240)
			$^{2)}$ Up to 240 $\rm mm^2$ can be connected depending on the cable manufacturer.
u strip (number of segments x width x segment thickness)			
Box terminal			6
	min.	mm	6 x 16 x 0.8
	max.	mm	10 x 24 x 1.0 + 5 x 24 x 1.0

			(2 x) 8 x 24 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	6 x 16 x 0.8
Flat copper strip, with holes	max.	mm	10 x 32 x 1.0 + 5 x 32 x 1.0
Connection width extension		mm	(2 x) 10 x 50 x 1.0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
	min.	mm	20 x 5
	max.	mm	30 x 10 + 30 x 5
Connection width extension		mm	
Connection width extension	max.	mm	2 x (10 x 50)
Control cables			
		mm <sup>2</sup>	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)

## Design verification as per IEC/EN 61439


Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	350
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	36.75
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


### **Technical data ETIM 7.0**


Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016])

Overload release current setting	А	140 - 350
Adjustment range undelayed short-circuit release	А	2 - 15
With thermal protection		Yes
Phase failure sensitive		Yes
Switch off technique		Electronic
Rated operating voltage	V	690 - 690
Rated permanent current lu	А	350
Rated operation power at AC-3, 230 V	kW	110
Rated operation power at AC-3, 400 V	kW	200
Type of electrical connection of main circuit		Screw connection
Type of control element		Rocker lever
Device construction		Built-in device fixed built-in technique
With integrated auxiliary switch		No
With integrated under voltage release		No
Number of poles		3
Rated short-circuit breaking capacity Icu at 400 V, AC	kA	70
Degree of protection (IP)		IP20
Height	mm	346
Width	mm	185
Depth	mm	260

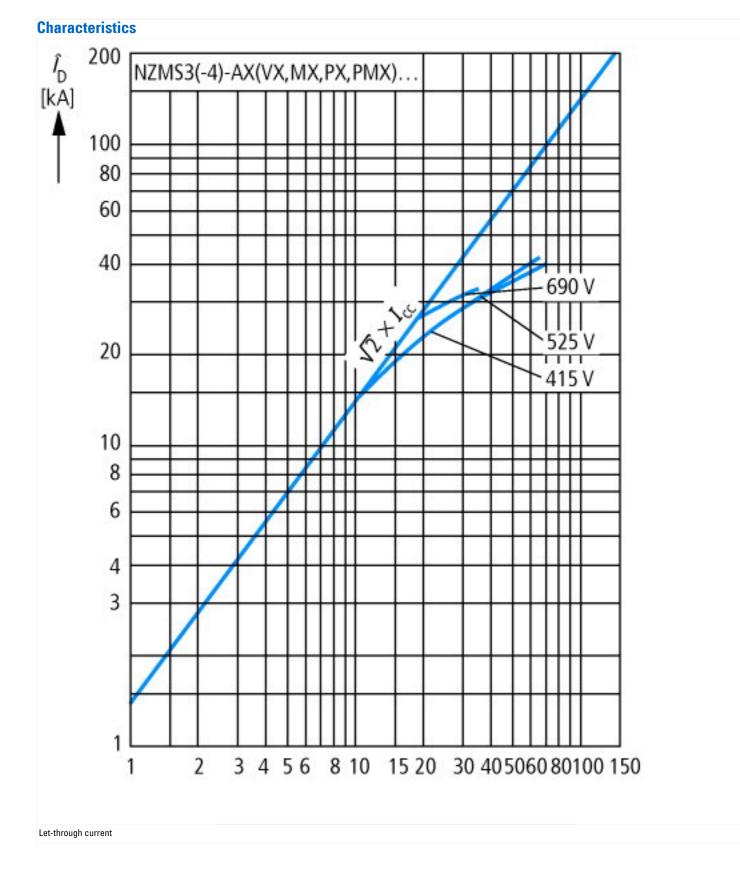

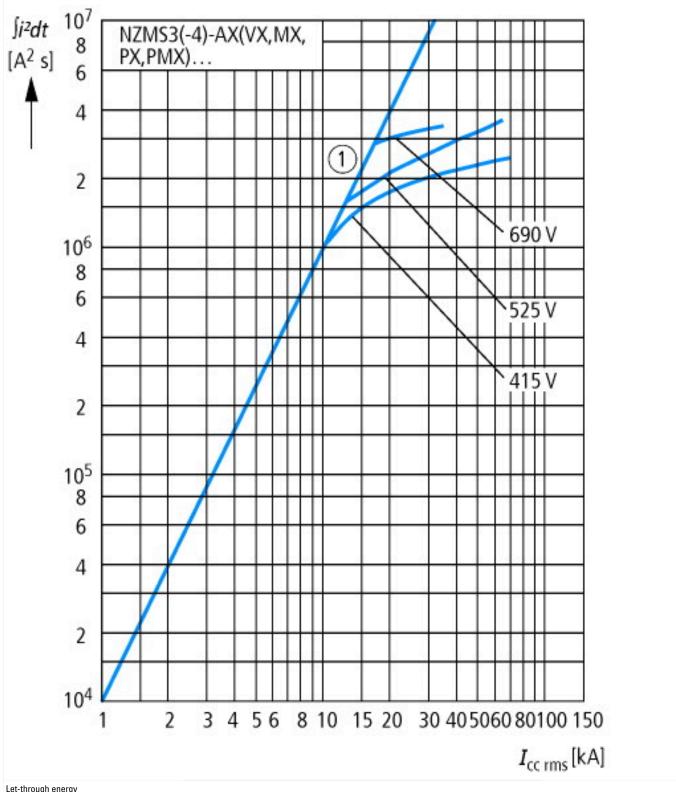

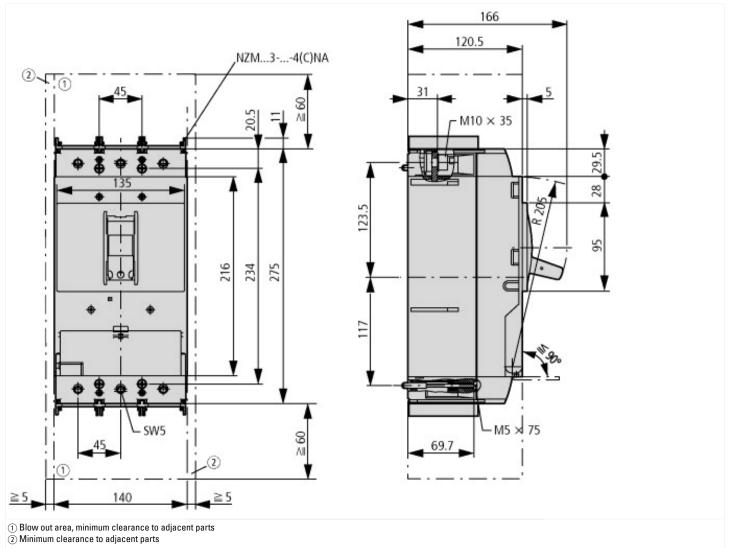

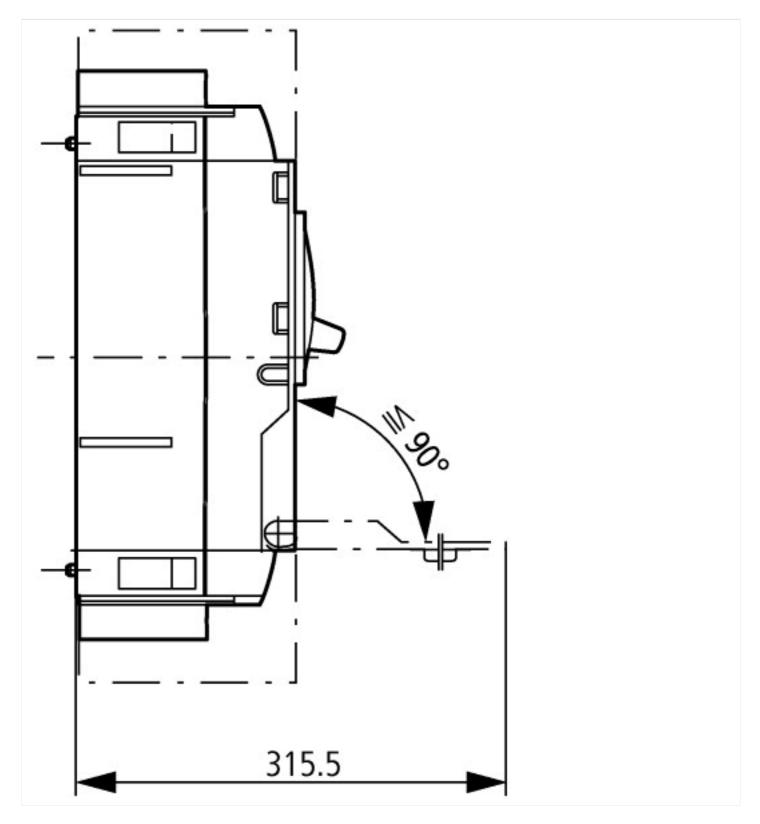

# Additional product information (links)

Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172		
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf		