### **DATASHEET - NZMS2-4-VX250**



### NZM2 PXR20 circuit breaker, 250A, 4p, screw terminal

Powering Business Worldwide\*

Part no. NZMS2-4-VX250 Catalog No. 191662

Similar to illustration

Delivery program			
Product range			Circuit-breaker
Protective function			Systems, cable, selectivity and generator protection
Standard/Approval			IEC
Installation type			Fixed
Release system			Electronic release
Construction size			NZM2
Description			LSI overload protection and delayed and non-delayed short-circuit protective device R.m.s. value measurement and "thermal memory" USB interface for configuration and test function with Power Xpert Protection Manager software Optionally communication-capable with interface module and internal Modbus RT module or CAM
Number of poles			4 pole
Standard equipment			Screw connection
Switching capacity			
400/415 V 50 Hz	I <sub>cu</sub>	kA	70
Rated current = rated uninterrupted current			
Rated current = rated uninterrupted current	$I_n = I_u$	Α	250
Neutral conductor	% of phase conductor	%	100
Setting range			
Overload trip			
中	l <sub>r</sub>	А	100 - 250
Short-circuit releases			
Non-delayed	$I_i = I_n \times \dots$		2 – 12
Delayed >	$I_{sd} = I_r x \dots$		2 – 10

### **Technical data**

#### General

delieral			
Standards		I	EC/EN 60947
Protection against direct contact		F	Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Ambient temperature, storage	°C	-	- 40 - + 70
Operation	°C	-	-25 - +70
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27	g	2	20 (half-sinusoidal shock 20 ms)
Safe isolation to EN 61140			
Between auxiliary contacts and main contacts	V A	AC 5	500

between the auxiliary contacts		V AC	300
Mounting position		V AC	Vertical and 90° in all directions
Woulding position			With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° right/left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions
Direction of incoming supply			as required
Degree of protection			as required
Device			In the operating controls area: IP20 (basic degree of protection)
Enclosures			With insulating surround: IP40 With door coupling rotary handle: IP66
Terminations			Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
Other technical data (sheet catalogue)			Temperature dependency, Derating
Circuit-breakers  Rated current = rated uninterrupted current	1 -1	Α	250
	I <sub>n</sub> = I <sub>u</sub>	A	230
Rated surge voltage invariability	U <sub>imp</sub>	V	9000
Main contacts Auxiliary contacts		V	8000 6000
Auxiliary contacts  Rated operational voltage	U <sub>e</sub>	V V AC	690
Overvoltage category/pollution degree	Ue	V AC	III/3
Rated insulation voltage	Ui	V	690
Use in unearthed supply systems	o <sub>l</sub>	V	≦ 690
Switching capacity		•	- 000
Rated short-circuit making capacity	I <sub>cm</sub>		
240 V	I <sub>cm</sub>	kA	220
400/415 V	I <sub>cm</sub>	kA	154
440 V 50/60 Hz	I <sub>cm</sub>	kA	143
525 V 50/60 Hz	I <sub>cm</sub>	kA	80
690 V 50/60 H	Ic	kA	40
Rated short-circuit breaking capacity I <sub>cn</sub>	I <sub>cn</sub>		
Icu to IEC/EN 60947 test cycle 0-t-C0	Icu	kA	
240 V 50/60 Hz	I <sub>cu</sub>	kA	100
400/415 V 50/60 Hz	I <sub>cu</sub>	kA	70
440 V 50/60 Hz	I <sub>cu</sub>	kA	65
525 V 50/60 Hz	I <sub>cu</sub>	kA	36
690 V 50/60 Hz	I <sub>cu</sub>	kA	20
Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0	Ics	kA	
240 V 50/60 Hz	I <sub>cs</sub>	kA	100
400/415 V 50/60 Hz	I <sub>cs</sub>	kA	70
440 V 50/60 Hz	I <sub>cs</sub>	kA	65
525 V 50/60 Hz	I <sub>cs</sub>	kA	36
690 V 50/60 Hz	I <sub>cs</sub>	kA	6
			Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.
Rated short-time withstand current			
t = 0.3 s	I <sub>cw</sub>	kA	1.9
t = 1 s	I <sub>cw</sub>	kA	1.9
Utilization category to IEC/EN 60947-2			A
Lifespan, mechanical(of which max. 50 $\%$ trip by shunt/undervoltage release)	Operations		20000
Lifespan, electrical			

AC-1			
400 V 50/60 Hz	Operations		10000
415 V 50/60 Hz	Operations		10000
690 V 50/60 Hz	Operations		7500
Max. operating frequency	эрэхэлэлэ	Ops/h	120
Total break time at short-circuit		ms	< 10
Terminal capacity		1113	(III)
Standard equipment			Screw connection
Optional accessories			Box terminal
			Tunnel terminal connection on rear
Round copper conductor			
Box terminal			
Solid		mm <sup>2</sup>	1 x (10 - 16) 2 x (6 - 16)
Stranded		mm <sup>2</sup>	1 x (25 - 185) 2 x (25 - 70)
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
Stranded			
1-hole		mm <sup>2</sup>	1 x (25 - 185)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm <sup>2</sup>	1 x (10 - 16) 2 x (6 - 16)
Stranded		mm <sup>2</sup>	1 x (25 - 185) 2 x (25 - 70)
Al circular conductor			
Tunnel terminal			
Solid		$\mathrm{mm}^2$	1 x 16
Stranded			
Stranded		mm <sup>2</sup>	1 x (25 - 185)
Cu strip (number of segments x width x segment thickness)			
Box terminal			
	min.	mm	2 x 9 x 0.8
	max.	mm	10 x 16 x 0.8
			(2x) 8 x 15.5 x 0,8
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	2 x 16 x 0.8
Flat copper strip, with holes	max.	mm	10 x 24 x 0.8
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M8
Direct on the switch			
	min.	mm	16 x 5
	max.	mm	24 x 8
Control cables			
		mm <sup>2</sup>	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	250
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	51.5625
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			

10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


### **Technical data ETIM 7.0**


Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])


Rated voltage Rated short-circuit breaking capacity Icu at 400 V, 50 Hz Overload release current setting Al 100 - 250 Adjustment range short-term delayed short-circuit release Al 2 - 10 Adjustment range undelayed short-circuit release Al 2 - 12 Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact With switched-off indicator With switched-off indicator With switched-off indicator With under voltage release Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive optional Motor drive integrated Motor drive optional	protection (eci@ss10.0.1-27-37-04-09 [AJZ/10013])			
Rated short-circuit breaking capacity lcu at 400 V, 50 Hz Overload release current setting A 100 - 250 Adjustment range short-term delayed short-circuit release A 2 - 10 Adjustment range undelayed short-circuit release A 2 - 12 Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact With switched-off indicator With switched-off indicator With under voltage release Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional Motor drive optional	Rated permanent current lu	A	A	250
Overload release current setting Adjustment range short-term delayed short-circuit release Adjustment range undelayed short-circuit release Built-in device fixed built-in technique Adjustment fixed built-in tech	Rated voltage	\	V	690 - 690
Adjustment range short-term delayed short-circuit release Adjustment range undelayed s	Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	k	kA	70
Adjustment range undelayed short-circuit release A 2 - 12 Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Nith switched-off indicator No With under voltage release No	Overload release current setting	A	A	100 - 250
Integrated earth fault protection Type of electrical connection of main circuit  Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  Number of poles Number of poles Number of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional  No	Adjustment range short-term delayed short-circuit release	A	A	2 - 10
Type of electrical connection of main circuit  Device construction  Built-in device fixed built-in technique  No  DIN rail (top hat rail) mounting  DIN rail (top hat rail) mounting optional  Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  O  With switched-off indicator  With under voltage release  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional  Screw connection  Built-in device fixed built-in technique  No  O  Rober lever  Screw connection  Built-in device fixed built-in technique  No  O  Rober lever  No  No  No  No  No  No  No  No  No  N	Adjustment range undelayed short-circuit release	A	A	2 - 12
Device construction  Suitable for DIN rail (top hat rail) mounting  DIN rail (top hat rail) mounting optional  Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  No  With switched-off indicator  With switched-off indicator  No  No  No  No  No  No  No  No  No	Integrated earth fault protection			No
Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Yes  Number of auxiliary contacts as normally closed contact 0 Number of auxiliary contacts as normally open contact 0 Number of auxiliary contacts as change-over contact 0 Number of auxiliary contacts as change-over contact 0 With switched-off indicator No With under voltage release No No Number of poles 4 Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated No Motor drive optional No Motor drive optional	Type of electrical connection of main circuit			Screw connection
DIN rail (top hat rail) mounting optional  Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  No  With switched-off indicator  With under voltage release  No  Number of poles  A Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  No  Motor drive optional  Yes	Device construction			Built-in device fixed built-in technique
Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  No  With switched-off indicator  No  With under voltage release  No  No  Number of poles  4  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Wotor drive integrated  No  Motor drive optional  No  No  No  No  No  No  No  No  No  N	Suitable for DIN rail (top hat rail) mounting			No
Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  No With switched-off indicator  With under voltage release  No Number of poles  4 Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional  O  No	DIN rail (top hat rail) mounting optional			Yes
Number of auxiliary contacts as change-over contact  With switched-off indicator  No  With under voltage release  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional  O  No  No  No  No  No  No  Yes	Number of auxiliary contacts as normally closed contact			0
With switched-off indicator  With under voltage release  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive optional  No  No  No  No  No  No  No  Yes	Number of auxiliary contacts as normally open contact			0
With under voltage release No Number of poles 4 Position of connection for main current circuit Type of control element Complete device with protection unit Wotor drive optional No	Number of auxiliary contacts as change-over contact			0
Number of poles  4 Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional  4 Rocker lever  Rocker lever  Yes  Motor drive optional  Yes	With switched-off indicator			No
Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive optional  Front side  Rocker lever  Yes  No  Yes	With under voltage release			No
Type of control element Complete device with protection unit Motor drive optional Rocker lever Yes No Yes	Number of poles			4
Complete device with protection unit  Yes  Motor drive integrated  Motor drive optional  Yes  Yes	Position of connection for main current circuit			Front side
Motor drive integrated No Motor drive optional Yes	Type of control element			Rocker lever
Motor drive optional Yes	Complete device with protection unit			Yes
	Motor drive integrated			No
Degree of protection (IP) IP20	Motor drive optional			Yes
	Degree of protection (IP)			IP20


### **Characteristics**

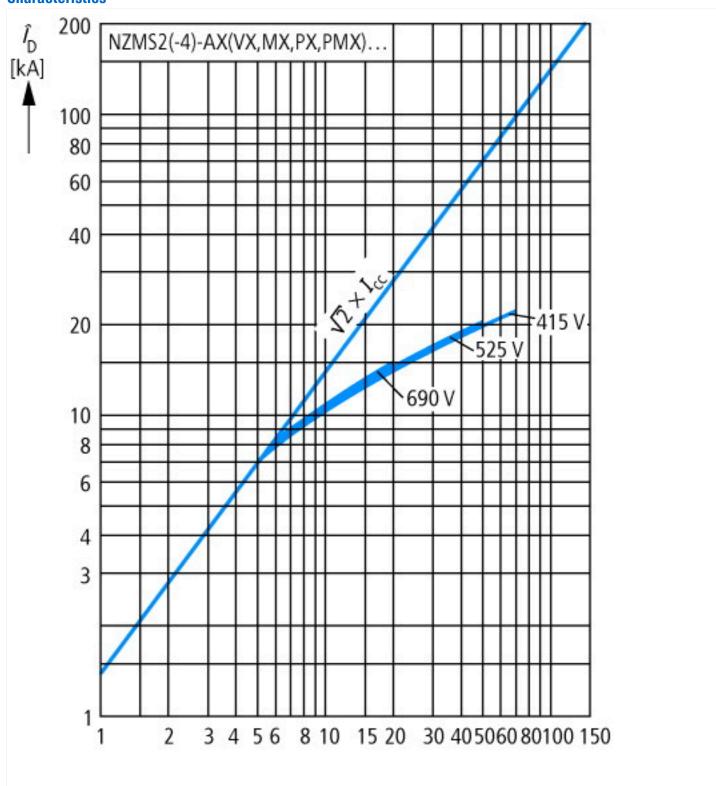

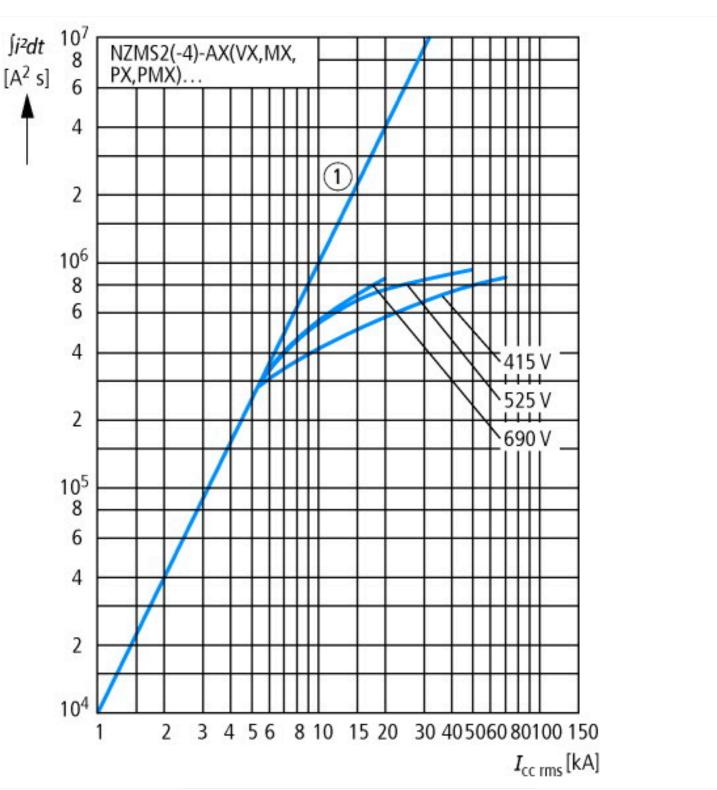

## **Dimensions**

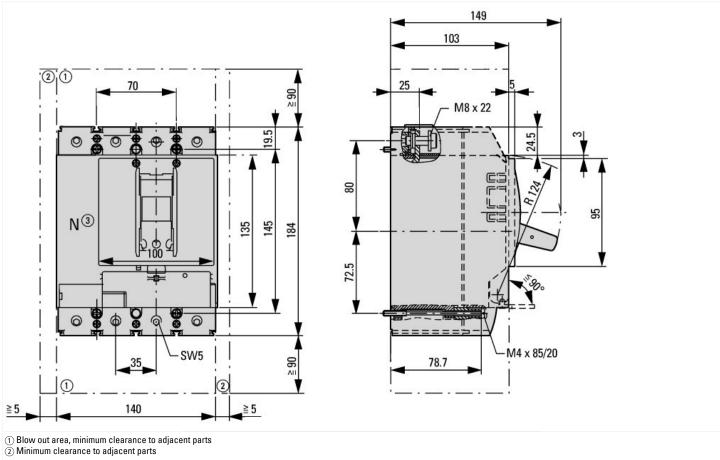

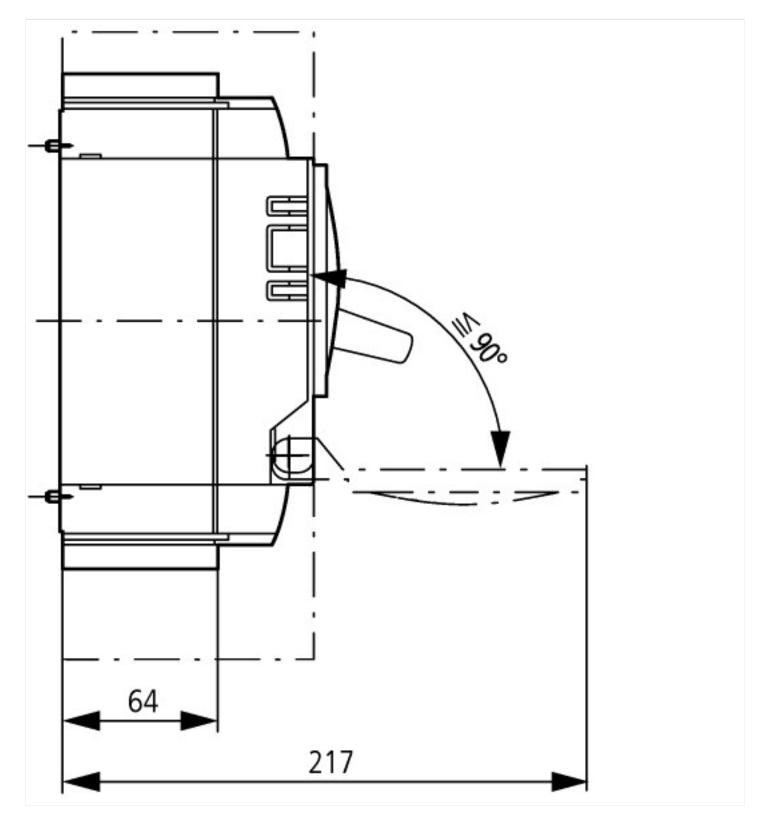

## **Additional product information (links)**

The state of the s	
Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf