DATASHEET - NZMN3-PMX350



NZM3 PXR25 circuit breaker - integrated energy measurement class 1, 400A, 3p, $Screw\ terminal$



Part no. NZMN3-PMX350 Catalog No. 192323

EL-Nummer (Norway) 4362733

Similar to illustration

Productive function Circuit-breaker	Delivery program			
Standard/Approved Installation type Releases system Construction size Description Releases system Construction size Description Release system Rel	Product range			Circuit-breaker
Installation type Rolease system Construction size Description Des	Protective function			Motor protection with class 1 Energy Metering
Installation type Rolease system Construction size Description Des				IE3 🗸
Release system Construction size Description Construction size Construction seasurement and fiberal enablishment seasos struction of circuit-breaker fulfills all requirements for AC-3 switching category. Construction seasors fulfills all requirements for AC-3 switching category. Construction over seasors fulfills all requirements for AC-3 switching category. Construction seasors fulfills all requirements for AC-3 switching category. Construction over seasors fulfills all requirements for AC-3 switching category. Construction over seasors fulfills all requirements for AC-3 switching category. Construction over seasors fulfills all requirements for AC-3 switching category. Construction over seasors fulfills all requirements for AC-3 switching category. Construction of the seasors fulfill sall requirements	Standard/Approval			IEC
Construction size Description	Installation type			Fixed
Description IEC/EN 69947-2 with characteristic conforming to IEC/EN 69947-41 with phase failure sensitivity The circuit-breaker fulfills all requirements for AC-3 switching category. R.m.s. value measurement and "thermal memory" Adjustable time delay setting to overcome current peaks tr at 6 x lr also infinity (without overload releases) All AC-3 rating data applies to direct switching by the circuit-breaker under normal operating conditions, if, for example, a contact takes over AC-3 switching under normal operating conditions, if, for example, a contact takes over AC-3 switching under normal operating conditions, if, for example, a contact takes over AC-3 switching under normal operating conditions, if, for example, a contact takes over AC-3 switching under normal operating conditions, if, for example, a contact take over AC-3 switching under normal operating conditions, if, for example, a contact take over AC-3 switching under normal operating conditions, if, for example, a contact take over AC-3 switching under normal operating conditions, if, for example, a contact take over AC-3 switching extends on a pole switching e	Release system			Electronic release
In failure sensitivity The circulr-breaker fulfills all requirements for AC-3 switching category. R.m.s. value measurement and "thermal memory" Adjustable time delay setting to overcome current peaks tr at 6 x Ir also infinity (without overload releases) Number of poles Standard equipment Switching capacity 400,415 V 50 Hz Rated current = rated uninterrupted current In = Iu	Construction size			NZM3
R.m.s. value measurement and "thermal memory" Adjustable time delay setting to overcome current peaks tr at 6x Ir also infinity (without overcode cleases) All AC-3 rating data applies to direct switching by the circuit-breaks under normal operating conditions, If, for example, a contactor takes over AC-3 switching under normal operating conditions, If, for example, a contactor takes over AC-3 switching under normal operating conditions, the full rated uninterrupted current applies to the circuit-breaker, In = Iu. Switching capacity 400/415 V 50 Hz Icu kA 50 Rated current = rated uninterrupted current In = Iu A 350 Setting range Overload trip Ir A 140 - 350 Short-circuit releases Ir A 140 - 350 Motor rating AC-3 50/60 Hz 380 V 400 V P KW 200 Motor rating AC-3 50/60 Hz	Description			
Adjustable time delay setting to overcome current peaks tr at & Ir also infinity (without overdeleases) All AC3 rating data applies to direct switching by the circuit-breaker under normal operating conditions, the full rated uninterrupted current applies to the circuit-breaker, in = iu. Number of poles Standard equipment Switching capacity 400/415 V 50 Hz A00/415 V 50 Hz A1				The circuit-breaker fulfills all requirements for AC-3 switching category.
Standard equipment Switching capacity 400/415 V 50 Hz Rated current = rated uninterrupted current Overload trip Overload trip Ir Non-delayed Non-delayed 380 V 400 V Motor rating AC-3 50/60 Hz Simple Screw connection				Adjustable time delay setting to overcome current peaks tr at 6 x Ir also infinity (without overload releases) All AC-3 rating data applies to direct switching by the circuit-breaker under normal operating conditions. If, for example, a contactor takes over AC-3 switching under normal operating conditions, the full rated uninterrupted current applies to the
Switching capacity 400/415 V 50 Hz Rated current = rated uninterrupted current In = Iu A 350 Setting range Overload trip Ir A 140 - 350 Short-circuit releases Non-delayed Non-delayed Motor rating AC-3 50/60 Hz 380 V 400 V Motor rating AC-3 50/60 Hz	Number of poles			3 pole
A00/415 V 50 Hz Rated current = rated uninterrupted current In = Iu A 350 Setting range Overload trip Ir A 140 - 350 Short-circuit releases Non-delayed Non-delayed Motor rating AC-3 50/60 Hz 380 V 400 V Motor rating AC-3 50/60 Hz Motor rating AC-3 50/60 Hz	Standard equipment			Screw connection
Rated current = rated uninterrupted current Setting range Overload trip Ir A 140 - 350 Short-circuit releases Non-delayed Non-delayed Motor rating AC-3 50/60 Hz 380 V 400 V Motor rating AC-3 50/60 Hz Short-circuit releases Short-circuit releases In a lu A 250 A 2 140 - 350 A 2 140 - 350 A 350	Switching capacity			
Overload trip Ir A 140 - 350 Short-circuit releases Non-delayed Non-delayed Motor rating AC-3 50/60 Hz 380 V 400 V Motor rating AC-3 50/60 Hz	400/415 V 50 Hz	I _{cu}	kA	50
Overload trip Ir A 140-350 Short-circuit releases Non-delayed Non-delayed Notor rating AC-3 50/60 Hz 380 V 400 V Motor rating AC-3 50/60 Hz Wotor rating AC-3 50/60 Hz Short-circuit releases Round Roun	Rated current = rated uninterrupted current	$I_n = I_u$	Α	350
Short-circuit releases Non-delayed I _i = I _n x Notor rating AC-3 50/60 Hz 380 V 400 V Motor rating AC-3 50/60 Hz Wotor rating AC-3 50/60 Hz	Setting range			
Short-circuit releases Non-delayed I _i = I _n x Motor rating AC-3 50/60 Hz 380 V 400 V P kW 200 Motor rating AC-3 50/60 Hz	Overload trip			
Non-delayed I _i = I _n x 2 – 15 Motor rating AC-3 50/60 Hz 380 V 400 V	中	I _r	А	140 - 350
Motor rating AC-3 50/60 Hz 380 V 400 V P kW 200 Motor rating AC-3 50/60 Hz	Short-circuit releases			
380 V 400 V P kW 200 Motor rating AC-3 50/60 Hz	Non-delayed	$I_i = I_n x \dots$		2 – 15
380 V 400 V P kW 200 Motor rating AC-3 50/60 Hz	Motor rating AC-3 50/60 Hz			
		Р	kW	200
		Р	kW	200

Technical data

Genera

General	
Standards	IEC/EN 60947
Protection against direct contact	Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature	

	°C	- 40 - + 70
	°C	-25 - +70
	g	20 (half-sinusoidal shock 20 ms)
	V AC	500
		300
		Vertical and 90° in all directions With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions
		with plug-in unit - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° right/left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions
		as required
		In the operating controls area: IP20 (basic degree of protection)
		With insulating surround: IP40 With door coupling rotary handle: IP66
		Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
		Weight Temperature dependency, Derating Effective power loss
	Α	350
U _{imp}		
		8000
		6000
U _e	V AC	690
		111/3
Ui		690
	V	≤ 690
l _{em}		
	kΔ	187
		105
		74
		53
	кА	40
		50
		50
		or.
		85
I _{cs}	kA	50
I _{cs}	kA	35
I _{cs}	kA	13
I _{cs}	kA	Maximum back-up fuse, if the expected short-circuit currents at the installation
		location exceed the switching capacity of the circuit-breaker.
	kA	3.3
I _{cw}	kA	3.3
	I _{cs}	

Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)	Operations		15000
Lifespan, electrical			
AC-1			
400 V 50/60 Hz	Operations		5000
415 V 50/60 Hz	Operations		5000
690 V 50/60 Hz	Operations		3000
AC3	·		
400 V 50/60 Hz	Operations		2000
415 V 50/60 Hz	Operations		2000
690 V 50/60 Hz	Operations		2000
Max. operating frequency		Ops/h	60
Total break time at short-circuit		ms	<10
Terminal capacity			
Standard equipment			Screw connection
Optional accessories			Box terminal Tunnel terminal connection on rear
Round copper conductor			
Box terminal			
Solid		mm ²	2 x 16
Stranded Tunnel terminal		mm ²	1 x (35 - 240) 2 x (25-120)
Solid		2	1 x 16
		mm ²	1 X 10
Stranded			
1-hole		mm ²	1 x (16 - 185)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm ²	1 x 16 2 x 16
Stranded		mm ²	1 x (25 - 240) 2 x (25 - 240)
Connection width extension		mm ²	
Connection width extension		mm ²	2 x 300
Al circular conductor			
Tunnel terminal			
Solid		mm^2	1 x 16
Stranded			
Stranded		mm ²	1 x (25 - 185) ²⁾
Double hole		mm ²	1 x (50 - 240) 2 x (50 - 240)
			²⁾ Up to 240 mm ² can be connected depending on the cable manufacturer.
Cu strip (number of segments x width x segment thickness)			
Box terminal			
	min.	mm	6 x 16 x 0.8
	max.	mm	10 x 24 x 1.0 + 5 x 24 x 1.0 (2 x) 8 x 24 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	6 x 16 x 0.8
Flat copper strip, with holes	max.	mm	10 x 32 x 1.0 + 5 x 32 x 1.0
Connection width extension		mm	(2 x) 10 x 50 x 1.0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
	min.	mm	20 x 5

	max.	mm	30 x 10 + 30 x 5
Connection width extension		mm	
Connection width extension	max.	mm	2 x (10 x 50)
Control cables			
		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)

Design verification as per IEC/EN 61439

Design vermoation as per illo/liv 01455			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	350
Equipment heat dissipation, current-dependent	P _{vid}	W	36.75
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
$10.2.3.3\mbox{Verification}$ of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must b observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must b observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)
--

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016])


[AUZ029010])		
Overload release current setting	Α	140 - 350
Adjustment range undelayed short-circuit release	А	2 - 15
With thermal protection		Yes
Phase failure sensitive		Yes
Switch off technique		Electronic
Rated operating voltage	V	690 - 690
Rated permanent current lu	Α	350
Rated operation power at AC-3, 230 V	kW	110
Rated operation power at AC-3, 400 V	kW	200
Type of electrical connection of main circuit		Screw connection


Type of control element			Rocker lever
Device construction			Built-in device fixed built-in technique
With integrated auxiliary switch			No
With integrated under voltage release			No
Number of poles			3
Rated short-circuit breaking capacity Icu at 400 V, AC	k	kA	50
Degree of protection (IP)			IP20
Height	n	mm	120.5
Width	n	mm	140
Depth	n	mm	275

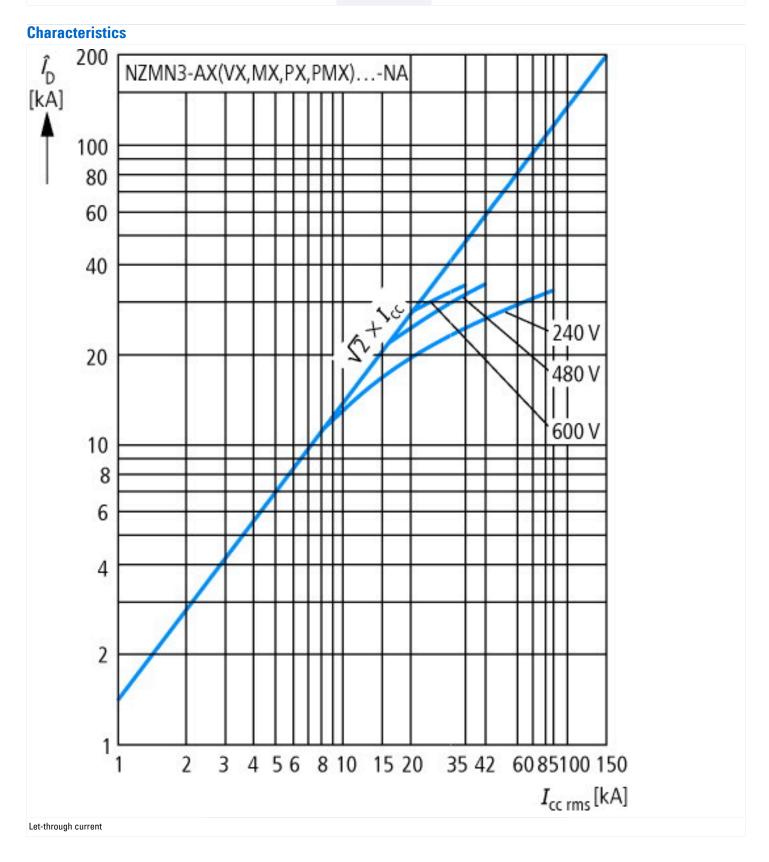

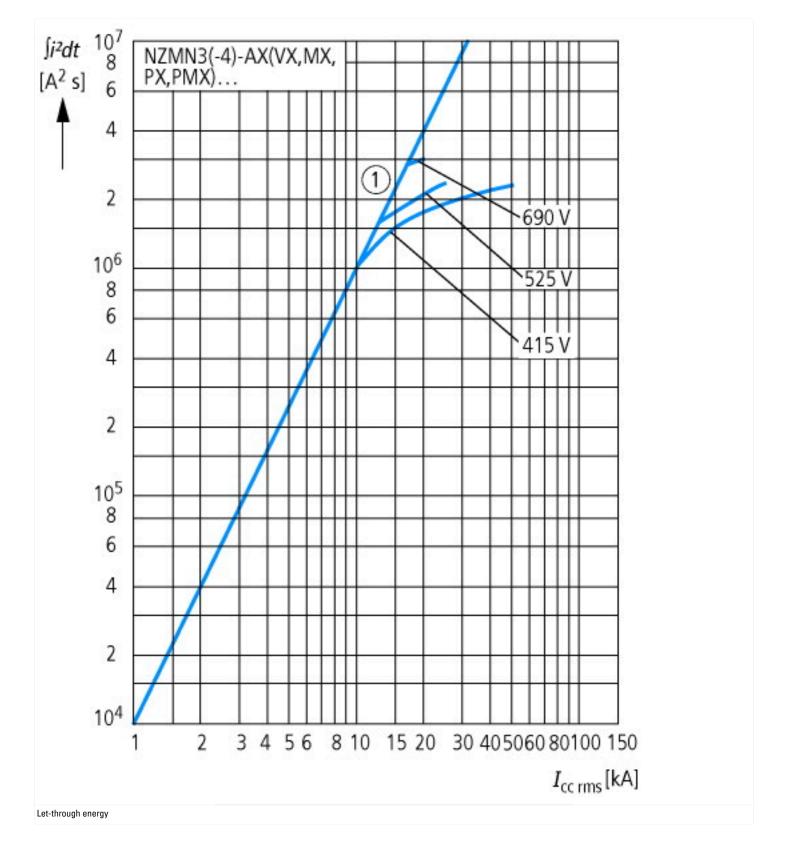

Dimensions

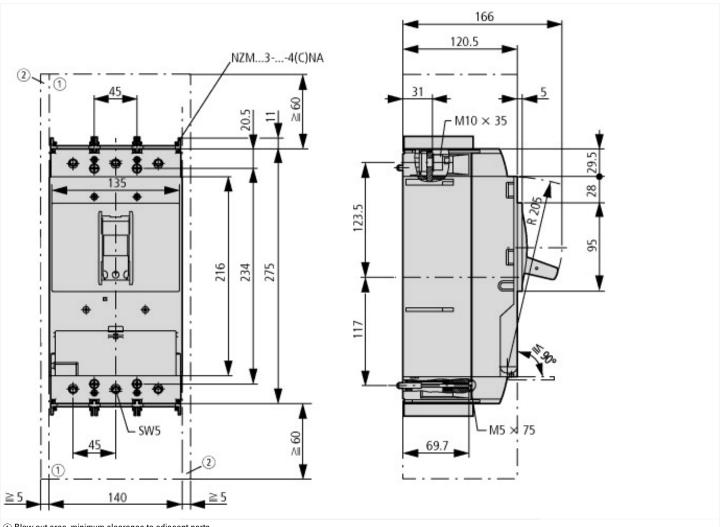

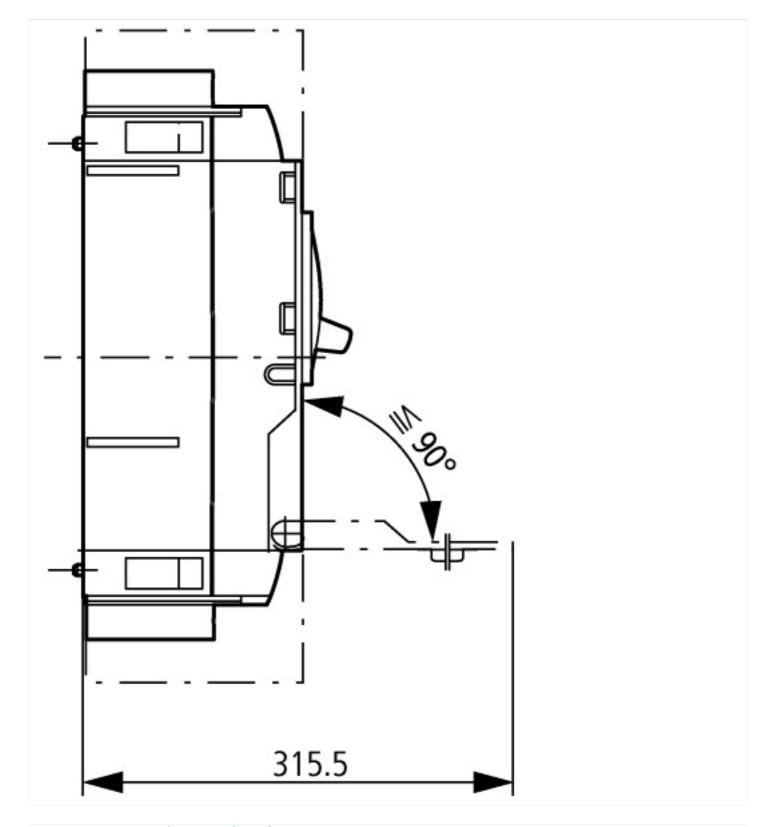

Additional product information (links)

Weight	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.171
Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172
Effective power loss	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.174
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf