



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Surge protection device - S-PT-EX(I)-24DC - 2880671

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection in the IP67 screw-on module for measuring sensors in intrinsically safe circuits, direct mounting with M20 x 1.5 outer thread, cable gland for the signal cable, two-stage protective circuit. HART-compatible.

Why buy this product

- Arresters in hexagonal pipe with various outer threads



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 049016

Technical data

Dimensions

Height	34 mm
Width	34 mm
Depth	137 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 50 °C
Degree of protection	IP67

General

Housing material	Zinc die-cast
Flammability rating according to UL 94	V-0
Color	silver
Standards for clearances and creepage distances	IEC 60664-1
	EN 60079-0
	EN 60079-11
Mounting type	ct screw connection

Surge protection device - S-PT-EX(I)-24DC - 2880671

Technical data

General

Type	Screw-in module
Number of positions	3
Direction of action	Line-Line & Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous voltage U_C	30 V DC
	21 V AC
Maximum continuous voltage U_C (wire-wire)	30 V DC
	21 V AC
Nominal current I_N	350 mA (50 °C)
Operating effective current I_C at U_C	$\leq 10 \mu\text{A}$
Residual current I_{PE}	$\leq 2 \mu\text{A}$
Nominal discharge current I_n (8/20) μs (Core-Core)	10 kA
Nominal discharge current I_n (8/20) μs (Core-Earth)	10 kA
Nominal discharge current I_n (8/20) μs (Shield-Earth)	10 kA (optional)
Max. discharge current I_{max} (8/20) μs maximum (Core-Core)	10 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Earth)	10 kA
Max. discharge current I_{max} (8/20) μs maximum (Shield-Earth)	10 kA
Nominal pulse current I_{an} (10/1000) μs (Core-Core)	30 A
Nominal pulse current I_{an} (10/1000) μs (Core-Earth)	100 A
Nominal pulse current I_{an} (10/1000) μs (Shield-Earth)	100 A
Impulse discharge current (10/350) μs , peak value I_{imp}	1 kA
Output voltage limitation at 1 kV/ μs (Core-Core) spike	$\leq 50 \text{ V}$
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 1.4 \text{ kV}$ (Direct grounding)
Output voltage limitation at 1 kV/ μs (Shield-Earth) spike	$\leq 600 \text{ V}$ (optional)
Output voltage limitation at 1 kV/ μs (Core-Core) static	$\leq 50 \text{ V}$
Output voltage limitation at 1 kV/ μs (Core-Earth) static	$\leq 1.4 \text{ kV}$ (Direct grounding)
Residual voltage at I_n (conductor-conductor)	$\leq 50 \text{ V}$
Residual voltage with I_{an} (10/1000) μs (conductor-conductor)	$\leq 50 \text{ V}$
Voltage protection level U_p (core-core)	$\leq 55 \text{ V}$ (C2 -5 kA)
	$\leq 50 \text{ V}$ (C1 - 250 A)
	$\leq 50 \text{ V}$ (C3 - 25 A)
	$\leq 80 \text{ V}$ (D1 - 1 kA)
Voltage protection level U_p (core-ground)	$\leq 1.4 \text{ kV}$ (C2 -5 kA, direct grounding)
	$\leq 1.4 \text{ kV}$ (C1 - 500 A)

Surge protection device - S-PT-EX(I)-24DC - 2880671

Technical data

Protective circuit

	≤ 1.4 kV (C3 - 100 A)
	≤ 1.4 kV (D1 - 1 kA)
Voltage protection level U_p (shield-ground)	≤ 650 V (C2 -5 kA optional)
Response time t_A (Core-Core)	≤ 1 ns
Response time t_A (Core-Earth)	≤ 100 ns
Response time t_A (Shield-Earth)	≤ 100 ns
Input attenuation a_E , sym.	typ. 0.5 dB (≤ 1 MHz / 50 Ω)
	typ. 0.2 dB (U_p to 400 kHz, 150 Ω)
Cut-off frequency f_g (3 dB), sym. in 50 Ohm system	typ. 6 MHz
Cut-off frequency f_g (3 dB), sym. in 150 Ohm system	typ. 2.5 MHz
Resistance in series	2.2 Ω ±10 %
Surge protection fault message	None
Impulse durability (conductor-conductor)	C2 - 10 kV/5 kA D1 - 1 kA
Impulse durability (conductor-ground)	C2 - 10 kV/5 kA D1 - 1 kA
Impulse durability (shield-ground)	C2 - 10 kV / 5 kA D1 - 1 kA
Alternating current carrying capacity (conductor-ground)	10 A - 1 s
Alternating current carrying capacity (shield-ground)	10 A - 1 s

Connection data

Connection name	Input/output
Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Connection line
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.6 Nm
Stripping length	6 mm
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	1.5 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	16

Standards and Regulations

Standards/regulations	DIN EN 61643-21
	EN 60079-0
	EN 60079-11
	EN 60079-26

Surge protection device - S-PT-EX(I)-24DC - 2880671

Technical data

General

Maximum inner capacitance C_i	2 nF
Maximum inner inductance L_i	1 μ H
Max. input current I_i	350 mA ($T_4, T_5, T_6 / \leq 50^\circ\text{C}$)
Max. input voltage U_i	30 V
Maximum input power P_i	3 W

Conformity / approvals

ATEX	# II 1G Ex ia IIC T4...T6 Ga
IECEX	Ex ia IIC T4...T6 Ga

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

EAC / EAC

Surge protection device - S-PT-EX(I)-24DC - 2880671

Approvals

Ex Approvals

IECEX / ATEX / INMETRO

Approvals submitted


Approval details

EAC


EAC

Drawings


Dimensional drawing

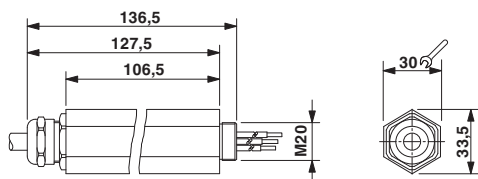

Circuit diagram

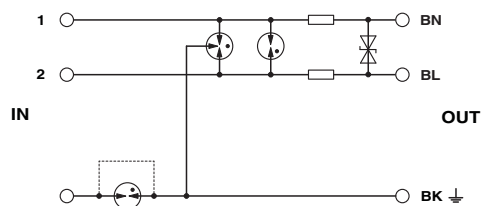

Application drawing

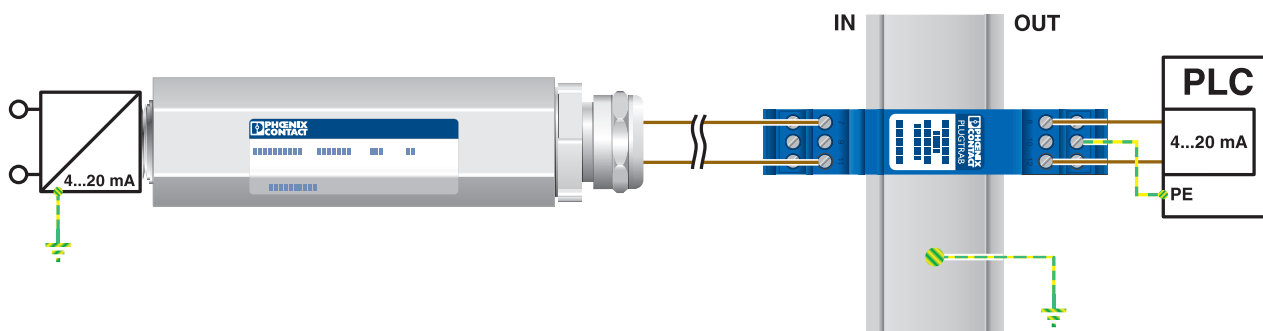

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Surge protection in the IP67 screw-on module for measuring sensors in intrinsically safe circuits, direct mounting with M20 x 1.5 outer thread, cable gland for the signal cable, two-stage protective circuit. HART-compatible.	2880671	S-PT-EX (I)-24DC	Buy on EAN