



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Panel feed-through terminal block - RWO 10-TC - 3074952

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel feed-through terminal block, Connection method: Bolt connection, Load current : 309 A, Cross section: 6 mm² - 150 mm², AWG 10 - 250 kcmil, Connection direction of the conductor to plug-in direction: 0 °, Width: 42.2 mm, Color: gray

Why buy this product

- Easy grouping with engagement pin versions
- Both terminal halves can be easily assembled by simply snapping them together
- Touch-proof insulating housing with transparent cover
- Spring-loaded spacers protect the bolt connection against loosening
- Automatic compensation of the panel thickness via the snap principle integrated in the insulation housing

Key Commercial Data

Packing unit	5 STK
GTIN	 4 046356 422147

Technical data

General

Number of levels	1
Number of connections	2
Nominal cross section	150 mm ²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0
Rated surge voltage	6 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I _N	309 A
Maximum load current	309 A
Nominal voltage U _N	1000 V
Open side panel	No
Number of positions	1

Panel feed-through terminal block - RWO 10-TC - 3074952

Technical data

Dimensions

Width	42.2 mm
Plate thickness	2 mm ... 8 mm

Connection data

Connection side	Level 1 above 1 below 1
Connection method	Bolt connection
Conductor cross section solid min.	6 mm ²
Conductor cross section solid max.	150 mm ²
Conductor cross section AWG min.	10
Conductor cross section AWG max.	250 kcmil
Screw thread	M10
Tightening torque, min	10 Nm
Tightening torque max	20 Nm

Standards and Regulations

Connection in acc. with standard	UL
	IEC 60947-7-1
	DIN 46 234
	DIN 46,235
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27141111
eCl@ss 4.1	27141111
eCl@ss 5.0	27141134
eCl@ss 5.1	27141134
eCl@ss 6.0	27141134
eCl@ss 7.0	27141134
eCl@ss 8.0	27141134

ETIM

ETIM 3.0	EC001283
ETIM 4.0	EC001283
ETIM 5.0	EC001283

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410

Panel feed-through terminal block - RWO 10-TC - 3074952

Classifications

UNSPSC

UNSPSC 13.2	39121410
-------------	----------

Approvals

Approvals

Approvals

UL Recognized / EAC

Ex Approvals

Approvals submitted


Approval details

UL Recognized		
	B	C
Nominal current I _N	309 A	309 A
Nominal voltage U _N	600 V	600 V


EAC

Drawings

Dimensional drawing

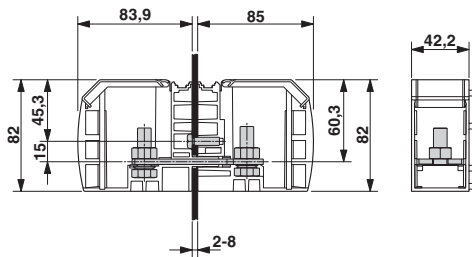

Dimensional drawing

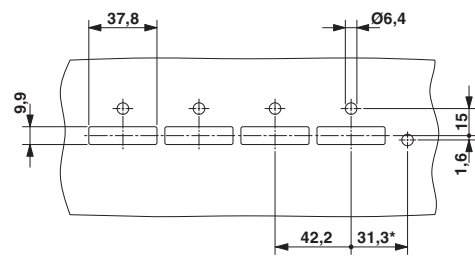

* Only when using the RW...-F flange plate

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Panel feed-through terminal block, Connection method: Bolt connection, Load current : 309 A, Cross section: 6 mm ² - 150 mm ² , AWG 10 - 250 kcmil, Connection direction of the conductor to plug-in direction: 0 °, Width: 42.2 mm, Color: gray	3074952	RWO 10-TC	Buy on EAN