

Cassette 2500A, IZMX404 without control cable connection



Part no. IZMX-CAS404-2500-1
 Catalog No. 183961
 Alternate Catalog No. 67C2762A51
 EL-Nummer 4398370
 (Norway)

Delivery program

Product range			Accessories
Accessories			Withdrawable units
Accessories			Cassettes
			Equipment supplied: arcing chamber cover
Rated current	I_n	A	2500
Pole			4
For use with			IZMX40...4-...W INX40...4-...W
Instructions			Without terminal blocks for the control circuit terminals. Please order the required quantity separately.
Information about equipment supplied			with arcing chamber cover
Installation type			Withdrawable


Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Chassis part power circuit breaker (EC002043)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Chassis part circuit breaker (ecl@ss10.0.1-27-37-04-22 [ACN955011])			
Rated current I_n		A	2500
Number of poles			4
Version as busbar adapter			No
Version as built-in device			Yes
Type of electrical connection of main circuit			Rail connection

Dimensions

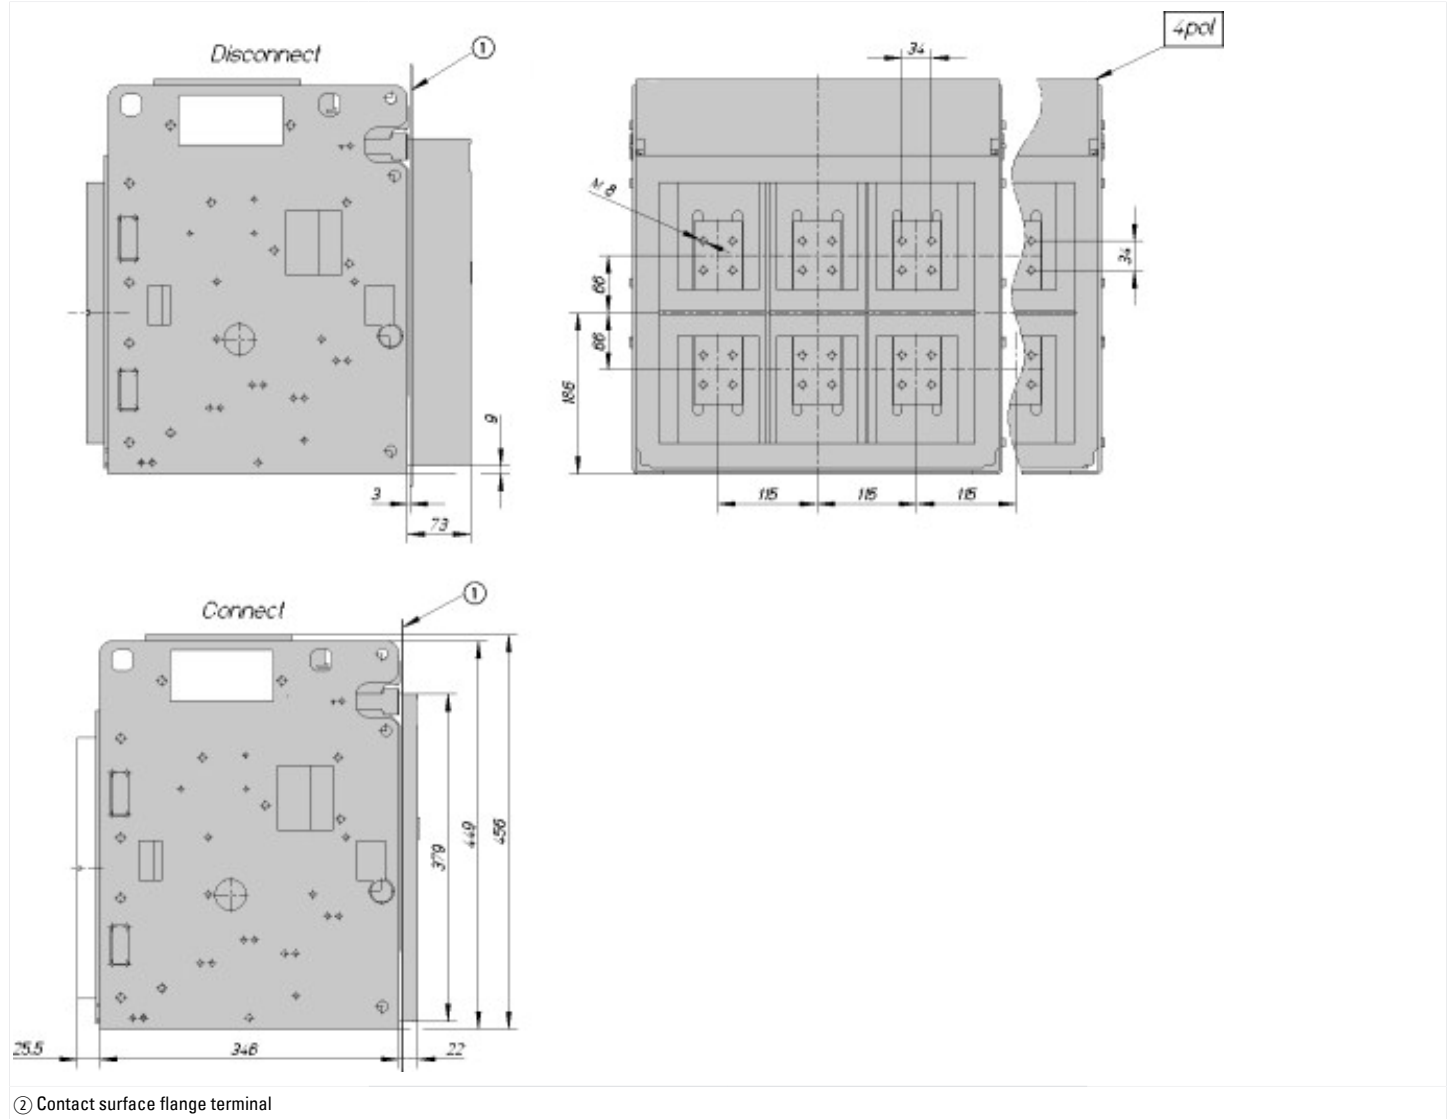

② Contact surface flange terminal