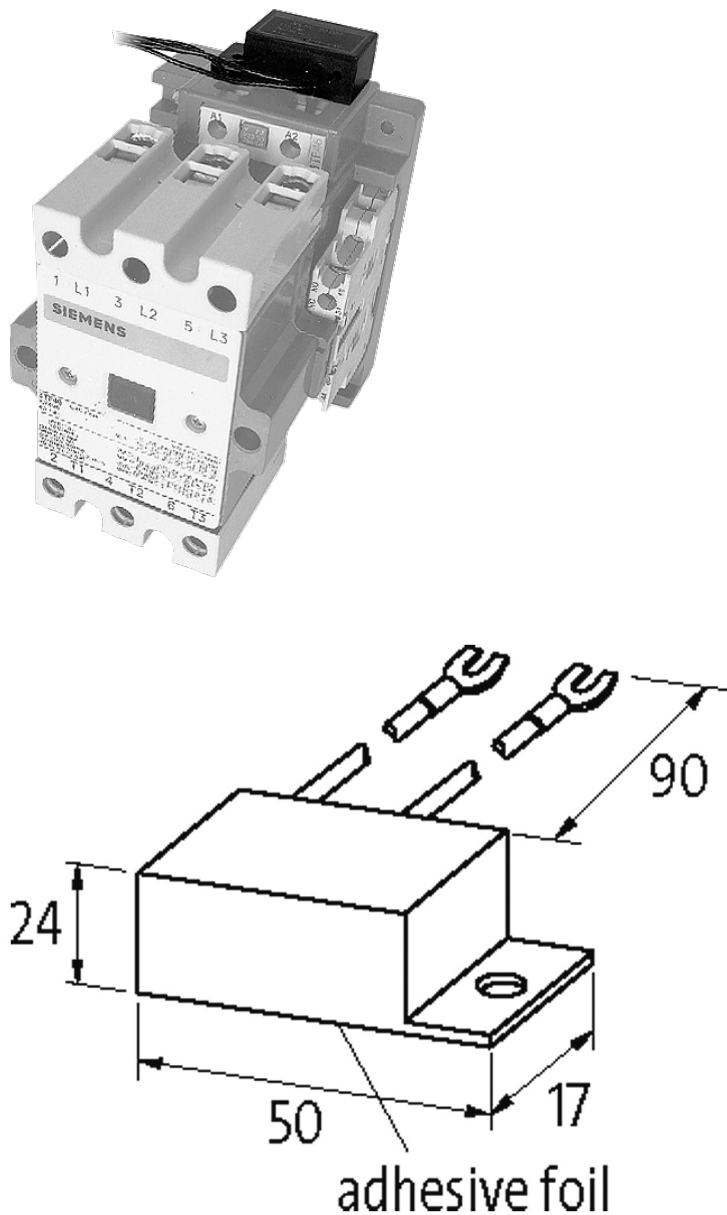


UNIVERSAL CONTACTOR SUPPRESSOR

RC, 110VAC/DC

110 V AC/DC
RC

For other configurations and voltages, please inquire.

[Link to Product](#)**Illustration**

stay connected



RC

Product may differ from Image

Approvals



Appropriate contactors

3 TF 46...50; 3 TB 48...56; 3 TC 48...56

Technical Data

Damping factor	approx. 1.5 × UN
Material	Flame retardant plastic acc. to (UL 94)
Connection wires	self-securing cable forks

General data

Temperature range	-20...+70 °C
Dimensions H × W × D	24×50×17 mm

Commercial data

country of origin	CZ
customs tariff number	85363010
EAN	4048879020497
eClass	27371013
Packaging unit	1