
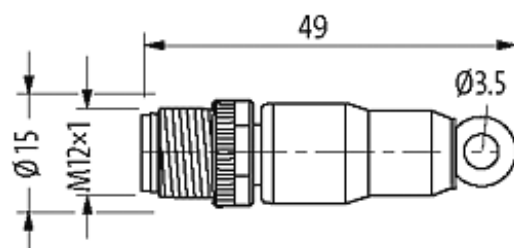



M12 BUS TERMINATING PLUG FOR PROFIBUS

PROFIBUS
Terminating resistor
Male
M12, 4-pole
B-coded

[Link to Product](#)**Illustration**

Male

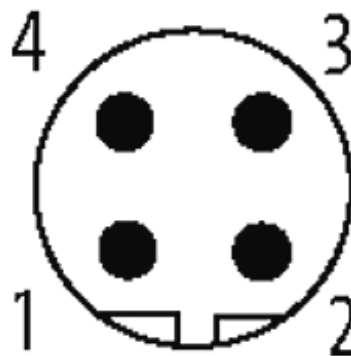

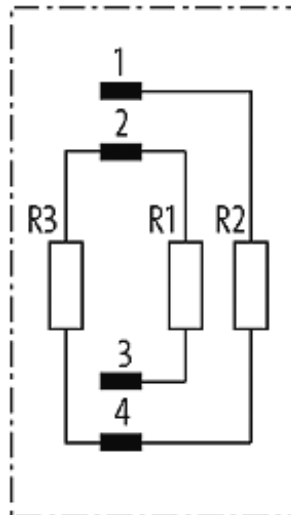

Product may differ from Image

Approvals



More Info



Form

Form 14041

Technical Data

Operating voltage	max. 30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

General data

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85331000
EAN	4048879198592
eClass	19070403

Packaging unit

1