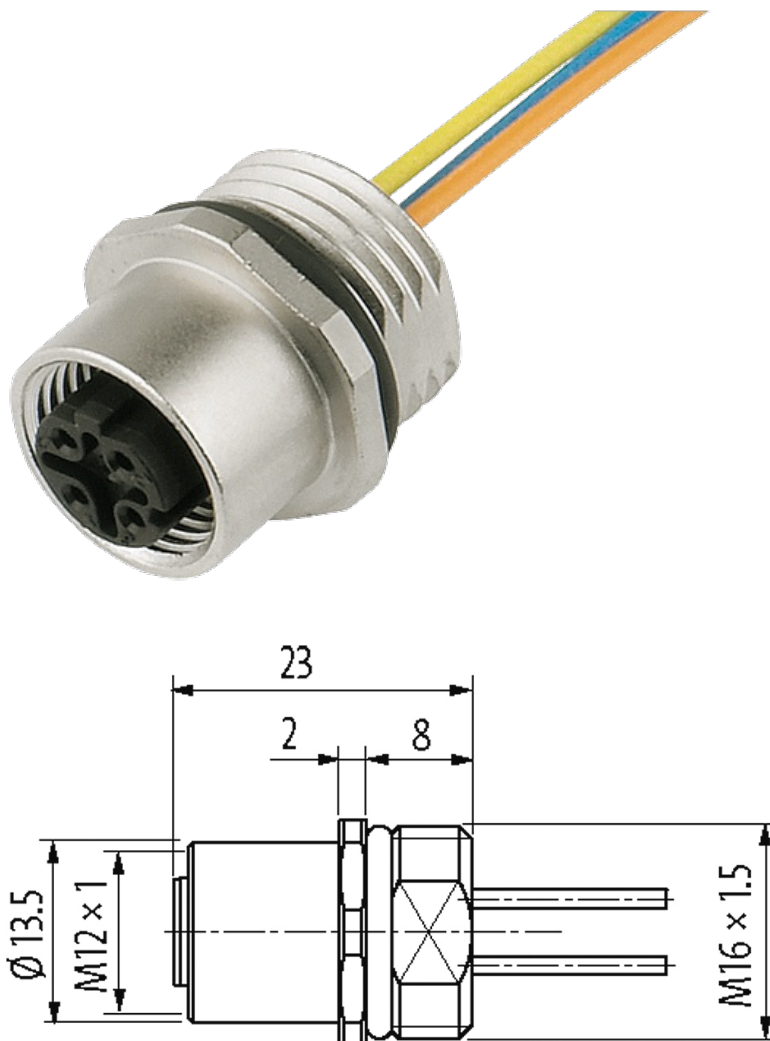



M12 female receptacle D-cod. front mount

wires PE 4x0.34 0,2m


Flange female
M12, 4-pole
D-coded
shielded
Front mounting
with multi-strand wire

[Link to Product](#)**Illustration**

stay connected

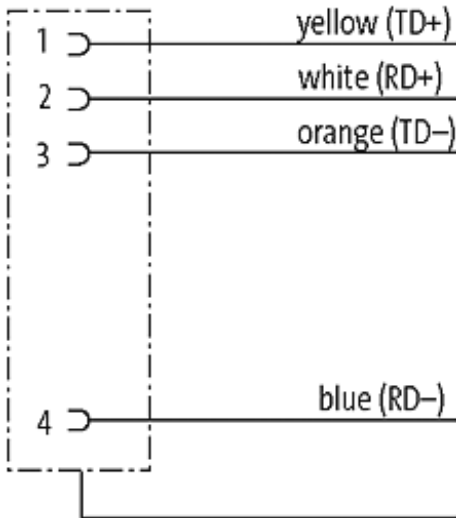

Female

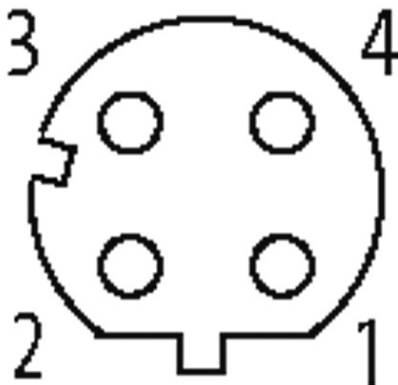

Product may differ from Image

More Info



EtherNet/IP

Form

Form 14501

Cables

Cable number	976
No./diameter of wires	4 × 0.34 mm ²
Wire isolation	PUR (wh, ye, bl, or)
Outer Ø	1.3 mm ±5%
Bend radius (fixed)	5 × outer Ø
Temperature range (fixed)	-40...+90 °C

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/19

Temperature range (mobile) -25...+90 °C

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Transfer parameters	CAT 5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	up to 100 Mbit/s full duplex
Coding	D-coded
Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)
Protection NEMA	3, 4, 6P (UL 50E)
Locking material	Zinc die casting, matte nickel plated

Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879197502
eClass	27279220
Packaging unit	1