

RJ45male 0° / RJ45male 0° Cabinet-Line sleeve, Giga

FRNC/LS0H 4x2xAWG26 shielded rd 20m

Ethernet CAT6A

Male straight – male straight



RJ45 – RJ45, 8-pole


shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

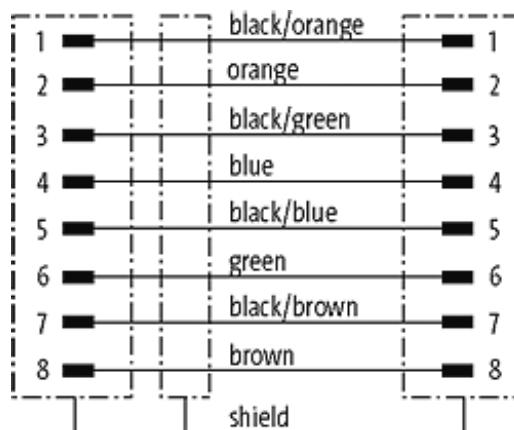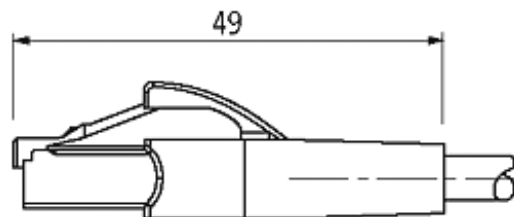

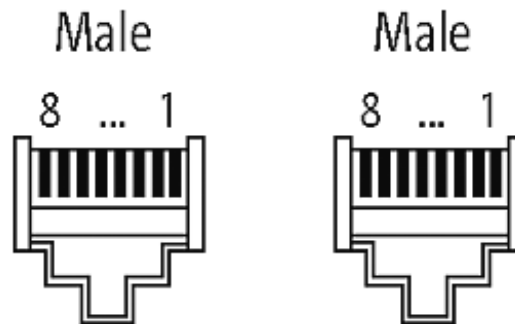

Product may differ from Image

More Info

Ethernet/IP

Form

Form 74712

Cables

Cable number	578
No./diameter of wires	4x2x0.14 mm ²
Wire isolation	PE (bkor, or, bkgn, gn, bkbl, bl, bkbr, br)
Jacket Color	red
Material (jacket)	FRNC
Outer Ø	5.9 mm ±5%
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-20...+60 °C
Temperature range (mobile)	-20...+60 °C
Color/numbering of wires	bkor, or, bkgn, gn, bkbl, bl, bkbr, br
Shield	yes
Bend radius (fixed)	10 × outer Ø

Technical Data

Operating voltage	max. 60 V DC
Rated surge voltage	1.0 kV
Operating current per contact	max. 1.76 A
Material group	IEC 60664-1, category I
Transfer parameters	CAT6, Class EA (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	10 Gbit/s
Protection	IP20

General data

Pollution Degree 3

Commercial data

country of origin	HU
customs tariff number	85444210

EAN	4048879595780
eClass	27061801
Packaging unit	1