

MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 250VA IN: 208...550VAC OUT : 2x115VAC special dimensions

Single-phase - Control and Isolation Transformers
250 VA
Isolation class T 40/B

Other voltages on request.

Link to Product

Illustration

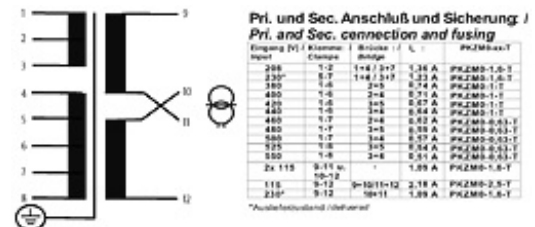

Product may differ from Image

Approvals



Input

Input voltage	208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC
Input current	1.36 A (208 V AC); 0.51 A (550 V AC)
Inrush current	26 A (208 V AC); 9.6 A (550 V AC)
Short-circuit current	25 A (208 V AC); 9.2 A (550 V AC)
Frequency	50...60 Hz

General data

Test isolation voltage	6.3 kV (prim./sec.)
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Dimensions H x W x D	102x120x122 mm
Fixing centers a x b x c	70x90 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	1 x 230, 1 x 115, 2 x 115 V AC
Output rating	250 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879588164
eClass	27031302
Packaging unit	1