

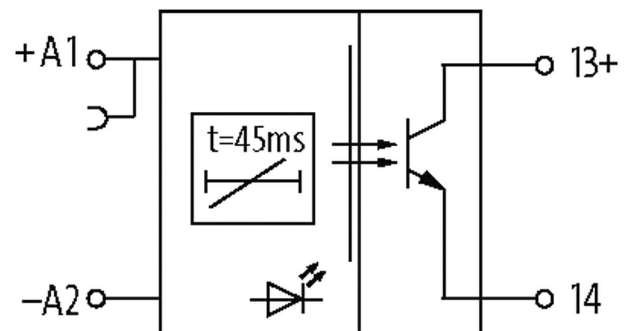
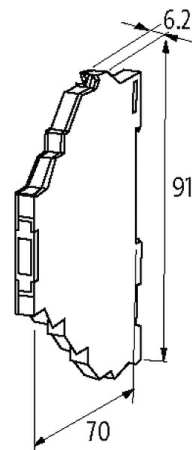
**MIRO 6.2 TIMER**

Impulsverlängerung 24 VDC / 25 mA / 45 ms

Transistor output

Impulse expansion: 40...45 ms

Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Test isolation voltage	no galvanic separation
Dimensions H×W×D	91×6.2×70 mm
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)

**Output**

Switching voltage	2...30 V DC
Switching current per output	max. 25 mA
Min. load current	0.1 mA
Switching frequency	max. 20 Hz

**Commercial data**

country of origin	CZ
customs tariff number	85364110
EAN	4048879411608
eClass	27210990
Packaging unit	1