
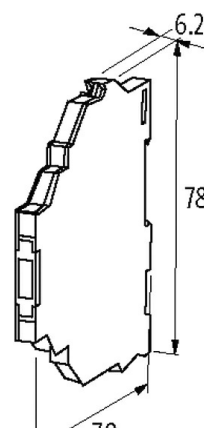
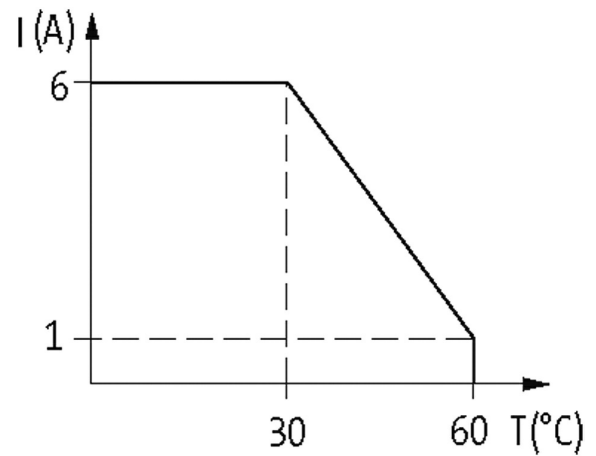
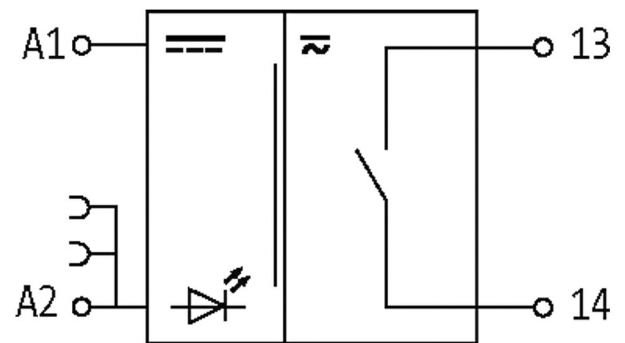


MIRO 6.2-1OUTPUT-REL.24V-1S-FK

MIRO 6.2 24V OUTPUT RELAY

1 NO contact
 6 A
 24 V AC/DC
 Spring clamp terminals

[Link to Product](#)**Illustration**

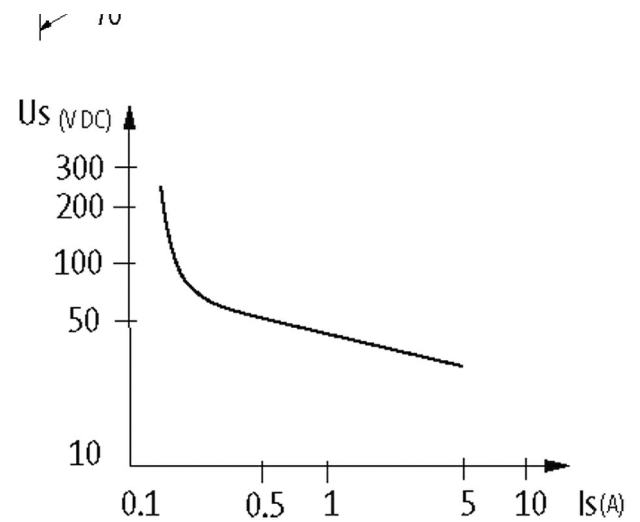

Product may differ from Image

Approvals



General data

Mech./ elect. life	20 000 000 switching cycles/load dependent
Test isolation voltage	4 kV; safe separation (EN 60947-1)
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Dimensions H×W×D	78×6.2×70 mm

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 6 A
Min. load current	100 mA (12 V DC)
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O2
Energize/release/contact bounce time	10/15/1.5 ms

Input

Connection voltage - current	24 V DC (19.2...30 V DC) - 17 mA
LED display	LED (green)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Utilization category	
AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
Commercial data	
country of origin	CZ
customs tariff number	85364900
EAN	4048879022163
eClass	27371001
Packaging unit	1