

## MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 4000VA IN: 400VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers  
4000 VA  
Spring clamp terminals  
Isolation class T 40/B

### [Link to Product](#)

#### Illustration



Product may differ from Image

#### Approvals



#### General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Test isolation voltage	4 kV (prim./sec.)
Dimensions H×W×D	206×198×250 mm
Fixing centers a×b×c	200×174×9 mm
Drill hole Ø	9×14 mm
Mounting method	Long-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

#### Output

Output voltage	230 V AC
Output rating	4000 VA

#### Input



Input voltage	400 V AC ±5%
Frequency	50...60 Hz
Input current	10.32 A (400 V AC)
Short-circuit current	480.8 A (400 V AC)
Inrush current	186.7 A (400 V AC)

#### Commercial data

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/21

country of origin	CZ
customs tariff number	85043200
EAN	4048879066273
eClass	27031302
Packaging unit	1

### Sketch

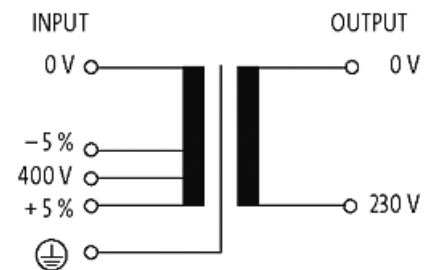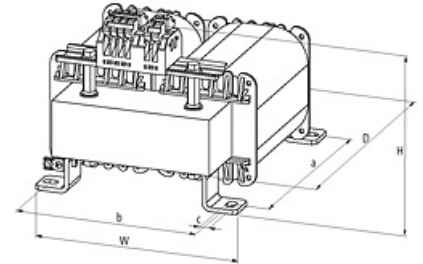

Product may differ from Image