

Overload relay 12.5...50 A For motor protection Size S3, Class 5...30
 Contactor mounting Main circuit: Screw terminal Auxiliary circuit:
 Spring-type terminal Manual-Automatic-Reset Internal ground fault
 detection !!! Phased-out product !!! Successor is SIRIUS 3RB3
 Preferred successor type is >>3RB3133-4UD0<<



Figure similar

product brand name	SIRIUS
Product designation	solid-state overload relay
General technical data	
Size of contactor can be combined company-specific	S3
Power loss [W] for rated value of the current	
• at AC in hot operating state	0.05 W
• at AC in hot operating state per pole	0.02 W
• Insulation voltage with degree of pollution 3 at AC rated value	1 000 V
Surge voltage resistance rated value	8 kV
• protection class IP on the front	IP00
Shock resistance	15g / 11 ms
Type of protection	PTB 06 ATEX 3001 Ex II (2) GD
Reference code acc. to DIN EN 81346-2	F
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m

Ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport 	<p>-25 ... +60 °C</p> <p>-40 ... +80 °C</p> <p>-40 ... +80 °C</p>
Wertebereich	100 %

Main circuit

Number of poles for main current circuit	3
adjustable pick-up value current of the current-dependent overload release	12.5 ... 50 A
Operating voltage	
<ul style="list-style-type: none"> at AC-3 rated value maximum 	1 000 V

Auxiliary circuit

Number of NC contacts for auxiliary contacts	1
Number of NO contacts for auxiliary contacts	1
Number of CO contacts	
<ul style="list-style-type: none"> for auxiliary contacts 	0
<ul style="list-style-type: none"> operating current of auxiliary contacts at AC-15 at 24 V 	4 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at AC-15 at 110 V 	4 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at AC-15 at 120 V 	4 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at AC-15 at 125 V 	4 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at AC-15 at 230 V 	3 A
<ul style="list-style-type: none"> operating current of auxiliary contacts at DC-13 at 24 V 	2 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at DC-13 at 60 V 	0.55 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at DC-13 at 110 V 	0.3 A
<ul style="list-style-type: none"> operating current of auxiliary contacts at DC-13 at 125 V 	0.3 A
<ul style="list-style-type: none"> Operating current of auxiliary contacts at DC-13 at 220 V 	0.11 A

Protective and monitoring functions

Trip class	CLASS 5E, 10E, 20E and 30E adjustable
-------------------	---------------------------------------

Short-circuit protection

Design of the fuse link	
<ul style="list-style-type: none"> for short-circuit protection of the auxiliary switch required 	fuse gL/gG: 6 A

Installation/ mounting/ dimensions

• mounting position	any
Mounting type	Contacteur mounting
Height	106 mm
Width	70 mm
Depth	124 mm
Required spacing	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	6 mm

Connections/ Terminals

Product function	
• removable terminal for auxiliary and control circuit	Yes
• Type of electrical connection for main current circuit	screw-type terminals
• Type of electrical connection for auxiliary and control current circuit	spring-loaded terminals
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (2.5 ... 16 mm ²)
— stranded	2x (10 ... 50 mm ²), 10 ... 70 mm ²
— finely stranded with core end processing	2x (2.5 ... 35 mm ²), 2.5 ... 50 mm ²
• at AWG conductors for main contacts	2x (10 ... 1/0), 1x (10 ... 2/0)
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	2x (0.25 ... 1.5 mm ²)

- finely stranded with core end processing
- at AWG conductors for auxiliary contacts

2x (0.25 ... 1.5 mm²)
2x (24 ... 16)

Electromagnetic compatibility




- Conducted interference due to burst acc. to IEC 61000-4-4 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
- Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5 2 kV (line to earth) corresponds to degree of severity 3
- Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5 1 kV (line to line) corresponds to degree of severity 3



Field-bound parasitic coupling acc. to IEC 61000-4-3 10 V/m

Electrostatic discharge acc. to IEC 61000-4-2 6 kV contact discharge / 8 kV air discharge

Certificates/ approvals

General Product Approval	EMC	For use in hazardous locations
 CCC	 EAC	 ATEX
 CSA	 RCM	
 UL		

Declaration of Conformity	Test Certificates	Marine / Shipping
 EG-Konf.	Miscellaneous Type Test Certificates/Test Report Special Test Certificate	 ABS  LRS

Marine / Shipping	other
 RINA  DNV-GL DNVGL.COM/AF	Miscellaneous Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2143-4UD0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2143-4UD0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2143-4UD0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2143-4UD0&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2143-4UD0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2143-4UD0&objecttype=14&gridview=view1>

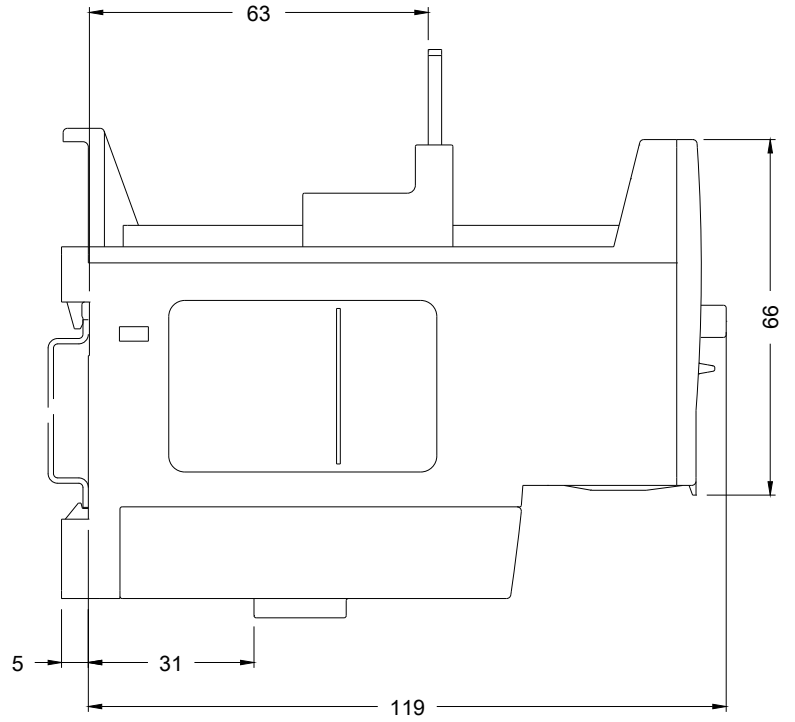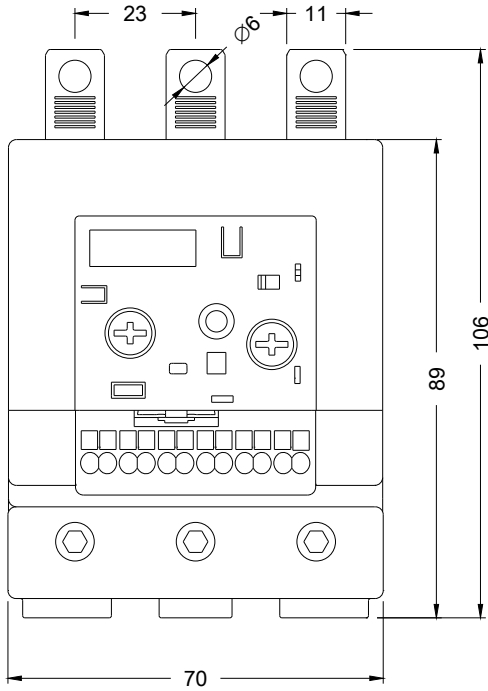

last modified:

08/13/2020