



Power contactor, AC-3 110 A, 55 kW / 400 V 2 NO + 2 NC, 48 V AC, 50 Hz  
3-pole, 3 NO, Size S3 screw terminal

|   |  |
|---|--|
| <b>product brand name</b>   | SIRIUS   |
| <b>product designation</b>  | Power contactor                                      |
| <b>product type designation</b>   | 3RT2   |
| <b>General technical data</b>   |  |
| <b>size of contactor</b>  | S3   |
| <b>product extension</b>  |  |
| <ul style="list-style-type: none"> <li>function module for communication</li> <li>auxiliary switch</li> </ul>   | <p>No</p> <p>Yes</p>                                 |
| <b>power loss [W] for rated value of the current</b>  |  |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> <li>at AC in hot operating state per pole</li> <li>without load current share typical</li> </ul>   | <p>23.7 W</p> <p>7.9 W</p> <p>19 W</p>               |
| <b>insulation voltage</b>   |  |
| <ul style="list-style-type: none"> <li>of main circuit with degree of pollution 3 rated value</li> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>   | <p>1 000 V</p> <p>690 V</p>                          |
| <b>surge voltage resistance</b>   |  |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> <li>of auxiliary circuit rated value</li> </ul>   | <p>8 kV</p> <p>6 kV</p>                              |
| maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1   | 690 V  |
| <b>shock resistance at rectangular impulse</b>  |  |
| <ul style="list-style-type: none"> <li>at AC</li> </ul>   | 6.7 g / 5 ms, 4.0 g / 10 ms                          |
| <b>shock resistance with sine pulse</b>   |  |
| <ul style="list-style-type: none"> <li>at AC</li> </ul>   | 10.6 g / 5 ms, 6.3 g / 10 ms                         |
| <b>mechanical service life (switching cycles)</b>   |  |
| <ul style="list-style-type: none"> <li>of contactor typical</li> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> <li>of the contactor with added auxiliary switch block typical</li> </ul> | <p>10 000 000</p> <p>5 000 000</p> <p>10 000 000</p> |
| <b>reference code according to IEC 81346-2</b>  | Q  |
| <b>Substance Prohibitance (Date)</b>  | 03/01/2017   |
| <b>Ambient conditions</b>   |  |
| installation altitude at height above sea level maximum   | 2 000 m  |
| <b>ambient temperature</b>  |  |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul>  | <p>-25 ... +60 °C</p> <p>-55 ... +80 °C</p>          |
| <b>relative humidity minimum</b>  | 10 %   |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>   | 95 %   |

## Main circuit

|  |                    |
|--|--------------------|
| <b>number of poles for main current circuit</b>                        | 3                  |
| <b>number of NO contacts for main contacts</b>                         | 3                  |
| <b>operating voltage</b>   |                    |
| • at AC-3 rated value maximum  | 1 000 V            |
| • at AC-3e rated value maximum   | 1 000 V            |
| <b>operational current</b>   |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 130 A              |
| • at AC-1  |                    |
| — up to 690 V at ambient temperature 40 °C rated value                 | 130 A              |
| — up to 690 V at ambient temperature 60 °C rated value                 | 110 A              |
| • at AC-3  |                    |
| — at 400 V rated value   | 110 A              |
| — at 500 V rated value   | 110 A              |
| — at 690 V rated value   | 98 A               |
| — at 1000 V rated value  | 30 A               |
| • at AC-3e   |                    |
| — at 400 V rated value   | 110 A              |
| — at 500 V rated value   | 110 A              |
| — at 690 V rated value   | 98 A               |
| — at 1000 V rated value  | 30 A               |
| • at AC-4 at 400 V rated value   | 97 A               |
| • at AC-5a up to 690 V rated value                                     | 120 A              |
| • at AC-5b up to 400 V rated value                                     | 110 A              |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=20 rated value                  | 98 A               |
| — up to 400 V for current peak value n=20 rated value                  | 98 A               |
| — up to 500 V for current peak value n=20 rated value                  | 98 A               |
| — up to 690 V for current peak value n=20 rated value                  | 98 A               |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=30 rated value                  | 65.3 A             |
| — up to 400 V for current peak value n=30 rated value                  | 65.3 A             |
| — up to 500 V for current peak value n=30 rated value                  | 65.3 A             |
| — up to 690 V for current peak value n=30 rated value                  | 65.3 A             |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 50 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value   | 46 A               |
| • at 690 V rated value   | 36 A               |
| <b>operational current</b>   |                    |
| • <b>at 1 current path at DC-1</b>                                     |                    |
| — at 24 V rated value  | 100 A              |
| — at 110 V rated value   | 9 A                |
| — at 220 V rated value   | 2 A                |
| — at 440 V rated value   | 0.6 A              |
| — at 600 V rated value   | 0.4 A              |
| • <b>with 2 current paths in series at DC-1</b>                        |                    |
| — at 24 V rated value  | 100 A              |
| — at 110 V rated value   | 100 A              |
| — at 220 V rated value   | 10 A               |
| — at 440 V rated value   | 1.8 A              |

|   |   |
|---|---|
| — at 600 V rated value  | 1 A   |
| ● <b>with 3 current paths in series at DC-1</b>                         |   |
| — at 24 V rated value   | 100 A   |
| — at 110 V rated value  | 100 A   |
| — at 220 V rated value  | 80 A  |
| — at 440 V rated value  | 4.5 A   |
| — at 600 V rated value  | 2.6 A   |
| ● <b>at 1 current path at DC-3 at DC-5</b>                              |   |
| — at 24 V rated value   | 40 A  |
| — at 110 V rated value  | 2.5 A   |
| — at 220 V rated value  | 1 A   |
| — at 440 V rated value  | 0.15 A  |
| — at 600 V rated value  | 0.06 A  |
| ● <b>with 2 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 100 A   |
| — at 110 V rated value  | 100 A   |
| — at 220 V rated value  | 7 A   |
| — at 440 V rated value  | 0.42 A  |
| — at 600 V rated value  | 0.16 A  |
| ● <b>with 3 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 100 A   |
| — at 110 V rated value  | 100 A   |
| — at 220 V rated value  | 35 A  |
| — at 440 V rated value  | 0.8 A   |
| — at 600 V rated value  | 0.35 A  |
| <b>operating power</b>  |   |
| ● at AC-2 at 400 V rated value  | 55 kW   |
| ● at AC-3   |   |
| — at 230 V rated value  | 30 kW   |
| — at 400 V rated value  | 55 kW   |
| — at 500 V rated value  | 75 kW   |
| — at 690 V rated value  | 90 kW   |
| — at 1000 V rated value   | 37 kW   |
| ● at AC-3e  |   |
| — at 230 V rated value  | 30 kW   |
| — at 400 V rated value  | 55 kW   |
| — at 500 V rated value  | 75 kW   |
| — at 690 V rated value  | 90 kW   |
| — at 1000 V rated value   | 37 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |   |
| ● at 400 V rated value  | 24.3 kW   |
| ● at 690 V rated value  | 32.9 kW   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=20 rated value                   | 39 kVA  |
| ● up to 400 V for current peak value n=20 rated value                   | 67 kVA  |
| ● up to 500 V for current peak value n=20 rated value                   | 84 kVA  |
| ● up to 690 V for current peak value n=20 rated value                   | 117 kVA   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=30 rated value                   | 26 kVA  |
| ● up to 400 V for current peak value n=30 rated value                   | 45.2 kVA  |
| ● up to 500 V for current peak value n=30 rated value                   | 56.5 kVA  |
| ● up to 690 V for current peak value n=30 rated value                   | 78 kVA  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |   |
| ● limited to 1 s switching at zero current maximum                      | 1 960 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 5 s switching at zero current maximum                      | 1 502 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 10 s switching at zero current maximum                     | 1 095 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 30 s switching at zero current maximum                     | 707 A; Use minimum cross-section acc. to AC-1 rated value   |
| ● limited to 60 s switching at zero current maximum                     | 562 A; Use minimum cross-section acc. to AC-1 rated value   |
| <b>no-load switching frequency</b>                                      |   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 5 000 1/h   |
| <b>operating frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> <li>• at AC-4 maximum</li> </ul>  | 900 1/h<br>350 1/h<br>850 1/h<br>850 1/h<br>200 1/h |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC  |
| <b>control supply voltage at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>  | 48 V<br>48 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.8 ... 1.1<br>0.85 ... 1.1                         |
| <b>apparent pick-up power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 296 VA  |
| <b>inductive power factor with closing power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.61  |
| <b>apparent holding power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 19 VA   |
| <b>inductive power factor with the holding power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.38  |
| <b>closing delay</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 13 ... 50 ms  |
| <b>opening delay</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10 ... 21 ms  |
| <b>arcing time</b>  | 10 ... 20 ms  |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2                                    |
| <b>Auxiliary circuit</b>  |   |
| number of NC contacts for auxiliary contacts instantaneous contact  | 2   |
| number of NO contacts for auxiliary contacts instantaneous contact  | 2   |
| operational current at AC-12 maximum  | 10 A  |
| <b>operational current at AC-15</b>   |   |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 6 A<br>3 A<br>2 A<br>1 A                            |
| <b>operational current at DC-12</b>   |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>6 A<br>6 A<br>3 A<br>2 A<br>1 A<br>0.15 A   |
| <b>operational current at DC-13</b>   |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 6 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)     |
| <b>UL/CSA ratings</b>   |   |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | <p>96 A<br/>99 A</p>  |
| <b>yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>  | <p>10 hp<br/>20 hp<br/>30 hp<br/>40 hp<br/>75 hp<br/>100 hp</p>   |
| <b>contact rating of auxiliary contacts according to UL</b>   | <p>A600 / P600</p>  |
| <b>Short-circuit protection</b>   |   |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>  | <p>gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)<br/>gG: 200A (690V,100kA), aM: 100A (690V,100kA), BS88: 160A (415V,80kA)<br/>gG: 10 A (500 V, 1 kA)</p> |
| <b>Installation/ mounting/ dimensions</b>   |   |
| <b>mounting position</b>  | <p>+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface</p>   |
| <b>fastening method</b> <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>   | <p>screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715<br/>Yes</p>   |
| <b>height</b>   | <p>140 mm</p>   |
| <b>width</b>  | <p>70 mm</p>  |
| <b>depth</b>  | <p>195 mm</p>   |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | <p>20 mm<br/>10 mm<br/>10 mm<br/>0 mm<br/>20 mm<br/>10 mm<br/>10 mm<br/>10 mm<br/>20 mm<br/>10 mm<br/>10 mm<br/>10 mm</p>   |
| <b>Connections/ Terminals</b>   |   |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>   | <p>screw-type terminals<br/>screw-type terminals<br/>Screw-type terminals<br/>Screw-type terminals</p>  |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul>  | <p>2x (2.5 ... 35 mm<sup>2</sup>), 1x (2.5 ... 50 mm<sup>2</sup>)<br/>2x (10 ... 1/0), 1x (10 ... 2)</p>  |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>  | <p>2.5 ... 16 mm<sup>2</sup><br/>6 ... 70 mm<sup>2</sup><br/>2.5 ... 50 mm<sup>2</sup></p>  |

|  |  |
|--|--|
| <b>connectable conductor cross-section for auxiliary contacts</b><br><ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>   | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b><br><ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for auxiliary contacts</li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |
| <b>AWG number as coded connectable conductor cross section</b><br><ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>  | 10 ... 2<br>20 ... 14  |

**Safety related data**

|  |  |
|--|--|
| <b>product function</b><br><ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> </ul>       | Yes<br>No  |
| B10 value with high demand rate according to SN 31920  | 1 000 000  |
| <b>proportion of dangerous failures</b><br><ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul> | 40 %<br>73 %                                     |
| failure rate [FIT] with low demand rate according to SN 31920  | 100 FIT  |
| <b>protection class IP on the front according to IEC 60529</b>   | IP20   |
| <b>touch protection on the front according to IEC 60529</b>  | finger-safe, for vertical contact from the front |
| <b>suitability for use</b><br><ul style="list-style-type: none"> <li>• safety-related switching on</li> <li>• safety-related switching OFF</li> </ul>  | Yes<br>Yes                                       |

**Certificates/ approvals**

**General Product Approval**



[Confirmation](#)



[KC](#)



|            |  |                                  |                          |                          |
|------------|--|----------------------------------|--------------------------|--------------------------|
| <b>EMC</b> | <b>Functional Safety/Safety of Machinery</b> | <b>Declaration of Conformity</b> | <b>Test Certificates</b> | <b>Marine / Shipping</b> |
|------------|--|----------------------------------|--------------------------|--------------------------|



[Type Examination Certificate](#)

[UK Declaration of Conformity](#)



[Special Test Certificate](#)



|                          |              |
|--------------------------|--------------|
| <b>Marine / Shipping</b> | <b>other</b> |
|--------------------------|--------------|



[Confirmation](#)

|                |                       |
|----------------|-----------------------|
| <b>Railway</b> | <b>Dangerous Good</b> |
|----------------|-----------------------|

[Vibration and Shock](#)

[Transport Information](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2047-1AH24>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2047-1AH24>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2047-1AH24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2047-1AH24&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2047-1AH24&lang=en)


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2047-1AH24/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2047-1AH24&objecttype=14&gridview=view1>

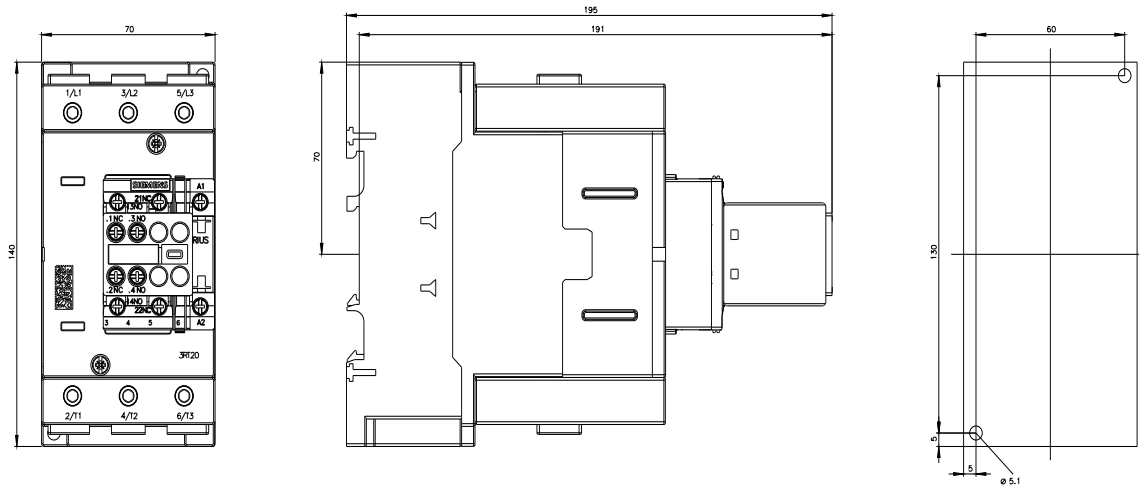

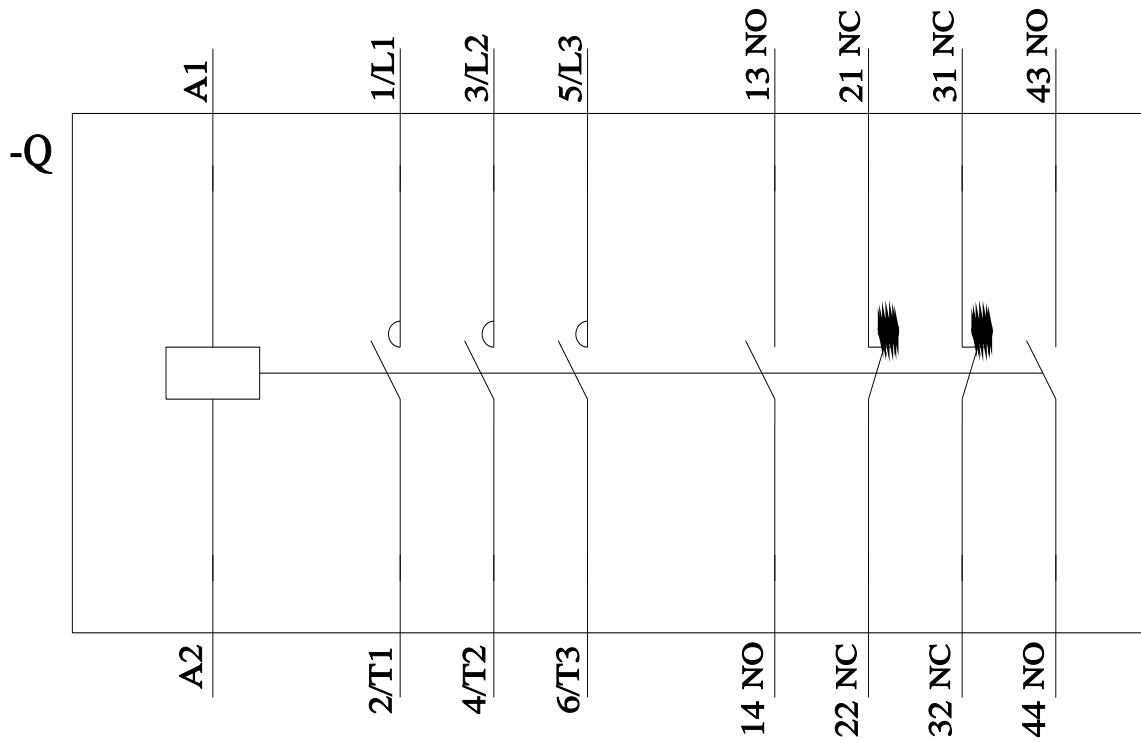

last modified:

2/15/2022 