


BCA-S-29-BK

Conduit PA6 UL94-V0, RAL 9005, NW29



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

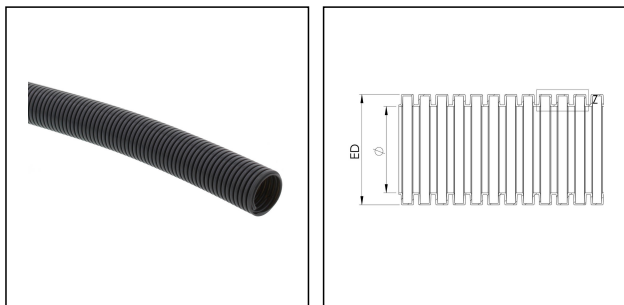

Material	PA6 UL94-V0
Temp. range min	-40 °C
Temp. range max	140 °C
UL-Temp. range max	105 °C
Operational areas	EN 45545 - Railway
Product Color	RAL 9005
NW	29
External diameter ED	34,5 mm
Ø inside	29 mm
Profile width A	3,4 mm
Width B	2,3 mm
Bending radius R	77 mm
Wall thickness S	0,4 mm
Model	Standard profile
UL 1696	Yes
Type	BCA-S-29-BK
Order no. RAL 9005	10107077
Packing unit	25 m
ETIM-Classification	EC001177

Recommended accessories

EBFS-29-32-BK	10106871
EBFS-29-40-BK	10106872

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

EMBFS-29-32-BK	10106903
EMBFS-29-40-BK	10106904
EMBFSI-29-32-BK	10106927
BCC-29-BK	10106945
EBF45-29-32-BK	10106961
EBF90-29-32-BK	10106979
EMBF90-29-32-BK	10107022
EMBF90-29-40-BK	10107023
EMBF45-29-32-BK	10107327
EMBF45-29-40-BK	10107328
EMBF45I-29-32-BK	10107344
EMBF90I-29-32-BK	10107368
EMBFSCG-29-32-BK	10107384
EMBF45CG-29-32-BK	10107996
EMBF90CG-29-32-BK	10108010
EBF45-29-40-BK	10108880
EBF90-29-40-BK	10108895

14.01.2021

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com