


BCAV-29-D-BG

Conduit, devided PA6 UL94-V2



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

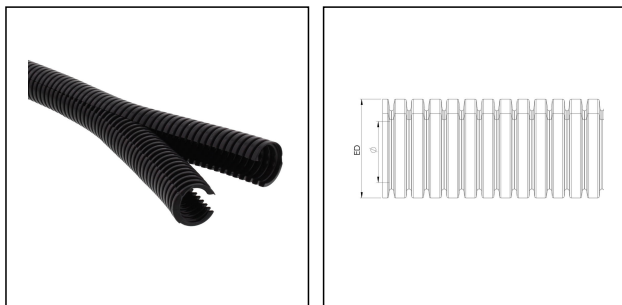

Material	PA6 UL94-V2
Temp. range min	-40 °C
Temp. range max	125 °C
Operational areas	for subsequent assembly
Product Color	RAL 7031
NW	29
External diameter ED	34,5 mm
Ø inside	26,6 mm
Profile width A	5,1 mm
Width B	3,3 mm
Bending radius R	140 mm
Wall thickness S	0,8 mm
Closable (two-part)	yes
Type	BCAV-29-D-BG
Order no. RAL 7031	10107145
Packing unit	25 m
ETIM-Classification	EC001177

Recommended accessories

EBFS-29-32-BG	10106854
EBFS-29-40-BG	10106855
EMBFS-29-32-BG	10106887
EMBFS-29-40-BG	10106888

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com

EMBF5I-29-32-BG	10106919
BCC-29-BG	10106936
EBF45-29-32-BG	10106953
EBF90-29-32-BG	10106971
EMBF45-29-32-BG	10106991
EMBF45-29-40-BG	10106992
EMBF90-29-32-BG	10107007
EMBF90-29-40-BG	10107008
EMBF45I-29-32-BG	10107337
EMBF90I-29-32-BG	10107360
EMBFSCG-29-32-BG	10107376
EMBF45CG-29-32-BG	10107990
EMBF90CG-29-32-BG	10108003
EBF45-29-40-BG	10108874

14.01.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

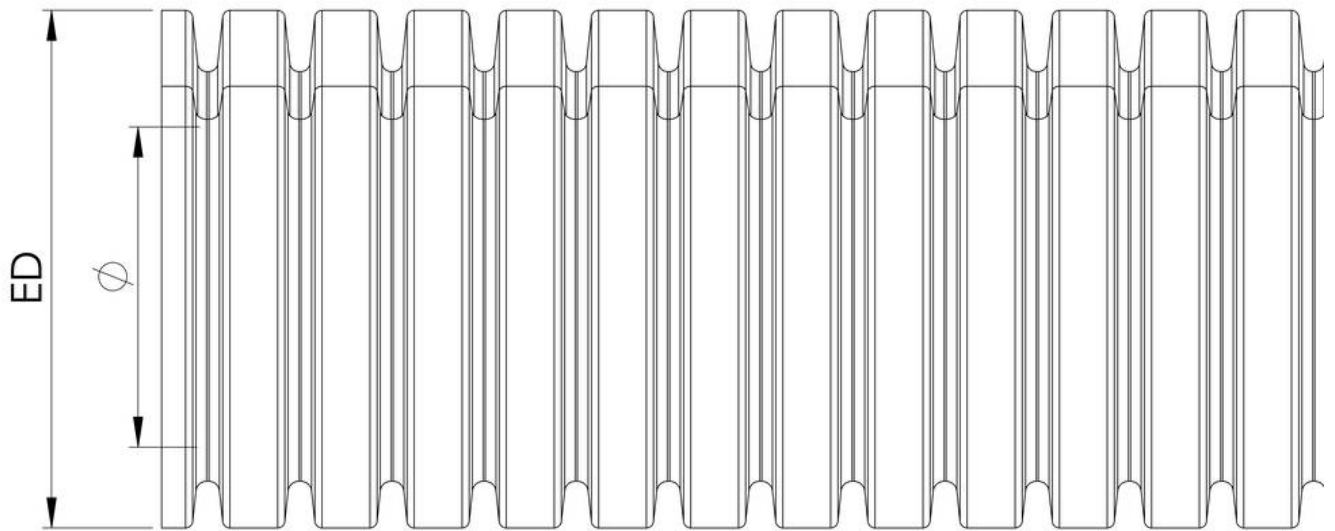

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com