


CMM 63 V0 LG

CONMAXX divided locknut, polyamide, RAL 7035, M63



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

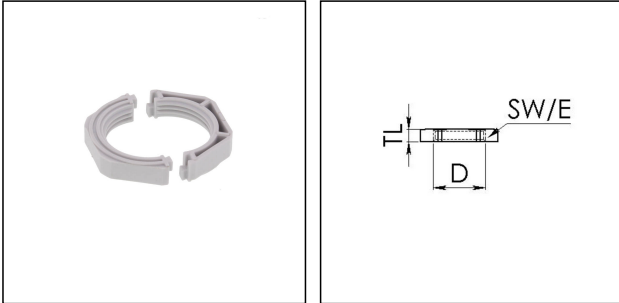

Material	Polyamide UL94-V0
Temp. range min	-40 °C
Temp. range max	100 °C
Thread type	M
Ø Connection thread D	63
Lead	1,5
Key width SW	72 mm
Collar diameter (E)	83 mm
Total length TL	7 mm
Product Color	RAL 7035
Type	CMM 63 V0 LG
Order no. RAL 7035	10108680
Packing unit	1
ETIM-Classification	EC000940

14.01.2021

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com