




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Radio interference suppression filter, three-phase with neutral conductor HLV 110-500/180

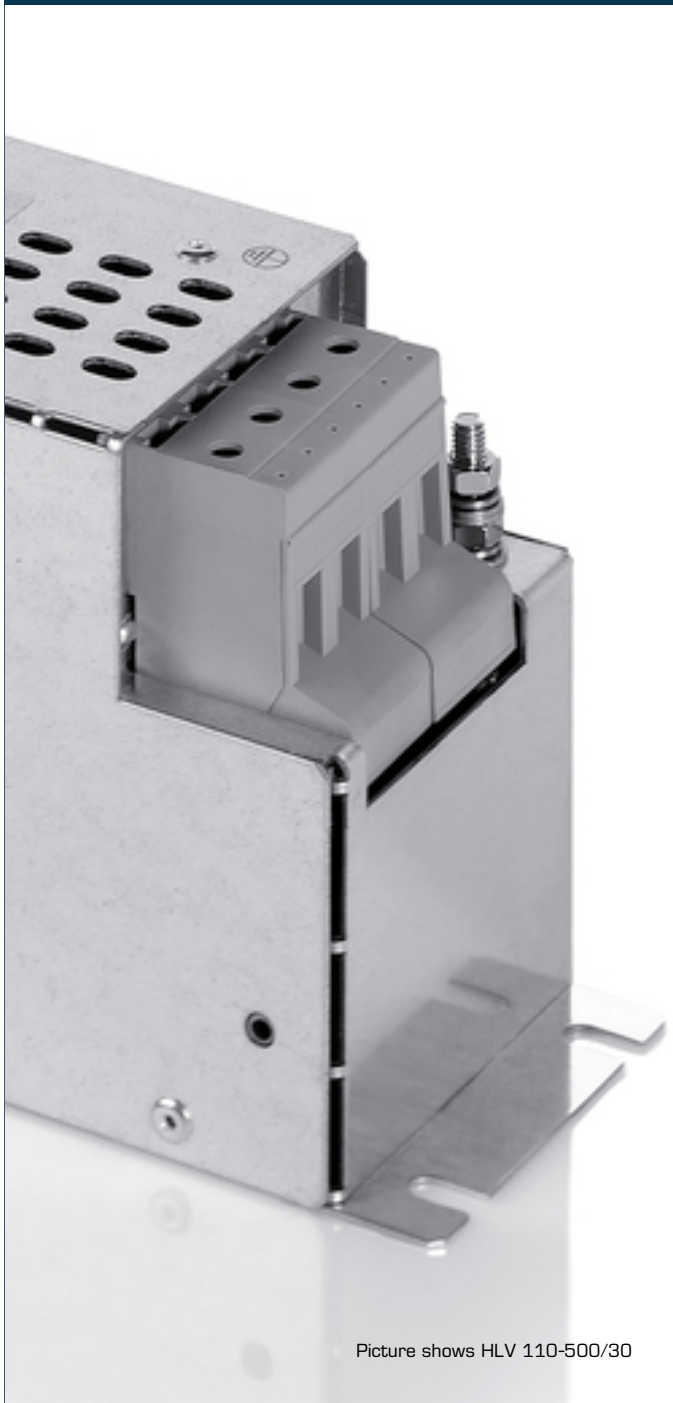

Picture shows HLV 110-500/30

Advantages

For enhanced requirements

Single-stage filter concept


Efficient filter effect against line-bound interference emissions

Increase in the interference immunity of the connected consumer

Applications

Radio interference suppression filter for line-side interference suppression of single devices, frequency inverters or as group interference suppression.

Sample application

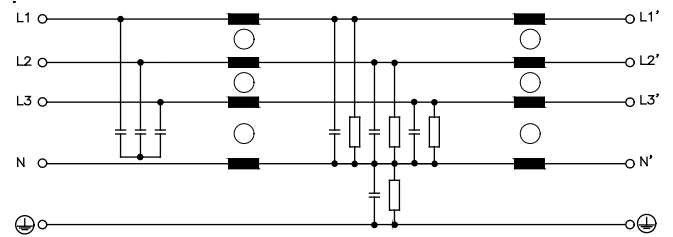

Standards

Radio interference suppression filter to DIN EN 60939-2

Approvals




Radio interference suppression filter, three-phase with neutral conductor

HLV 110-500/180

Type		HLV 110-500/180	
Electrical data	Operating data		
	Rated voltage	3 x 520 Vac	
	Voltage range	0 - 520 Vac	
	Rated current	3 x 180 A+N	
	Leakage current (50 Hz)*	31.00 mA	
	Leakage current (50 Hz)**	296.00 mA	
	Rated frequency	50 - 60 Hz	
	Overtopping Capacity	150 %, shortly	
	Approvals		-
	Environment		
Ambient temperature max.	50 °C		
Climatic category	25/085/21 (in accordance with EN 60068-1)		
Safety and protection			
Protection index	IP 20		
Type	Metal enclosure		
Safety class (prepared)	I		
Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE		
Notes			
*	Leakage current measured against the maximum permissible input voltage fluctuation in accordance with IEC 38 ±10 %		
**	Leakage current by loss of two phases		
Order numbers			
Order Number	HLV 110-500/180		

Type		HLV 110-500/180
Mechanical data	Terminal and mounting	
	Terminals phase	Screw clamp, 95 mm ²
	Terminals phase/N	Screw clamp, 95 mm ²
	Fixing method	Mounting lugs
	Fixing screws	M6
Measures and weights		
Weight	11.10 kg	

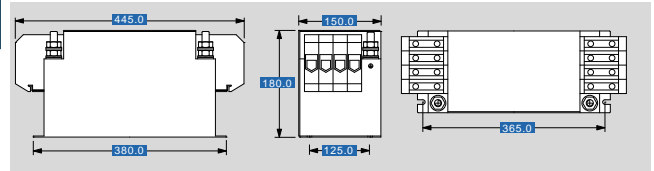

Subjects to change.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Radio interference suppression filter, for inverter applications and plant engineering, three phase + neutral conductor, 4 x 8 - 4 x 250 A	HLV110500180	HLV 110-500/180	Buy on EAN