



Variable frequency drive, 400 V AC, 3-phase, 4.1 A, 1.5 kW, IP66/NEMA 4X,
Brake chopper, Local controls, FS2



Part no. DC1-344D1NB-A6SCE1
Catalog No. 185729
Alternate Catalog No. DC1-344D1NB-A6SCE1

Delivery program

				This item is only available until 04/30/2021, after which it will be replaced with the following item: 199434, DC1-344D1FB-A6SCE1
Product range				Variable frequency drives
Part group reference (e.g. DIL)				DC1
Rated operational voltage	U_e			400 V AC, 3-phase 480 V AC, 3-phase
Output voltage with V_e	U_2			400 V AC, 3-phase 480 V AC, 3-phase
Mains voltage (50/60Hz)	U_{LN}	V		380 (-10%) - 480 (+10%)
Rated operational current				
At 150% overload	I_e	A		4.1
Note				Rated operational current at an operating frequency of 6 kHz and an ambient air temperature of +40 °C
Assigned motor rating				
Note				for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm^{-1} at 50 Hz or 1800 min^{-1} at 60 Hz
Note				Overload cycle for 60 s every 600 s
Note				at 400 V, 50 Hz
150 % Overload	P	kW		1.5
150 % Overload	I_M	A		3.6
Note				at 440 - 480 V, 60 Hz
150 % Overload	P	HP		2
150 % Overload	I_M	A		3.4
Degree of Protection				IP66/NEMA 4X
Interface/field bus (built-in)				OP-Bus (RS485)/Modbus RTU, CANopen®
Fieldbus connection (optional)				SmartWire-DT
Fitted with				Brake chopper 7-digital display assembly Local controls Additional PCB protection
Parameterization				Keypad Fieldbus drivesConnect drivesConnect mobile (App)
Frame size				FS2
Connection to SmartWire-DT				no

Technical data

General

Standards				Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3 Safety requirements: IEC/EN 61800-5-1
Certifications				CE, UL, cUL, RCM, Ukr SEPRO, EAC
Production quality				RoHS, ISO 9001
Climatic proofing	ρ_w	%		< 95%, average relative humidity (RH), non-condensing, non-corrosive
Air quality				3C3, 3S3
Ambient temperature				
Operating ambient temperature min.		°C		-10
Operating ambient temperature max.		°C		+ 40
				operation (with 150 % overload)

Storage	θ	°C	-40 - +60
Mounting position			Vertical
Altitude		m	0 - 1000 m above sea level Above 1000 m: 1% derating for every 100 m max. 4000 m
Degree of Protection			IP66/NEMA 4X
Protection against direct contact			BGV A3 (VBG4, finger- and back-of-hand proof)

Main circuit

Supply			
Rated operational voltage	U_e		400 V AC, 3-phase 480 V AC, 3-phase
Mains voltage (50/60Hz)	U_{LN}	V	380 (-10%) - 480 (+10%)
Input current (150% overload)	I_{LN}	A	5.6
System configuration			AC supply systems with earthed center point
Supply frequency	f_{LN}	Hz	50/60
Frequency range	f_{LN}	Hz	48 - 62
Mains switch-on frequency			Maximum of one time every 30 seconds
Power section			
Function			Variable frequency drive with internal DC link and IGBT inverter
Overload current (150% overload)	I_L	A	6.15
max. starting current (High Overload)	I_H	%	175
Note about max. starting current			for 2,5 seconds every 600 seconds
Output voltage with V_e	U_2		400 V AC, 3-phase 480 V AC, 3-phase
Output Frequency	f_2	Hz	0 - 50/60 (max. 500)
Switching frequency	f_{PWM}	kHz	8 adjustable 4 - 32 (audible)
Operation Mode			U/f control Speed control with slip compensation sensorless vector control (SLV) PM motors Synchronous reluctance motors BLDC motors
Frequency resolution (setpoint value)	Δf	Hz	0.1
Rated operational current			
At 150% overload	I_e	A	4.1
Note			Rated operational current at an operating frequency of 6 kHz and an ambient air temperature of +40 °C
Power loss			
Heat dissipation at rated operational current $I_e = 150\%$	P_V	W	76.5
Efficiency	η	%	94.9
Maximum leakage current to ground (PE) without motor	I_{PE}	mA	12.6
Fitted with			Brake chopper 7-digital display assembly Local controls Additional PCB protection
Frame size			FS2
Motor feeder			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm^{-1} at 50 Hz or 1800 min^{-1} at 60 Hz
Note			Overload cycle for 60 s every 600 s
Note			at 400 V, 50 Hz
150 % Overload	P	kW	1.5
Note			at 440 - 480 V, 60 Hz
150 % Overload	P	HP	2
maximum permissible cable length	l	m	screened: 100 screened, with motor choke: 200 unscreened: 150 unscreened, with motor choke: 300
Apparent power			
Apparent power at rated operation 400 V	S	kVA	2.84
Apparent power at rated operation 480 V	S	kVA	3.41

Braking function			
Standard braking torque			max. 30 % MN
DC braking torque			max. 100% of rated operational current I_e , variable
Braking torque with external braking resistance			Max. 100% of rated operational current I_e with external braking resistor
minimum external braking resistance	R_{min}	Ω	250
Switch-on threshold for the braking transistor	U_{DC}	V	780 V DC

Control section

Reference voltage	U_s	V	10 V DC (max. 10 mA)
Analog inputs			2, parameterizable, 0 - 10 V DC, 0/4 - 20 mA
Analog outputs			1, parameterizable, 0 - 10 V
Digital inputs			4, parameterizable, max. 30 V DC
Digital outputs			1, parameterizable, 24 V DC
Relay outputs			1, parameterizable, N/O, 6 A (250 V, AC-1) / 5 A (30 V, DC-1)
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU, CANopen®

Assigned switching and protective elements

Power Wiring			
Safety device (fuse or miniature circuit-breaker)			
IEC (Type B, gG), 150 %			FAZ-B10/3
UL (Class CC or J)		A	6
Mains contactor			
150 % overload (CT/ I_H , at 50 °C)			DILM7 DILEM-10
Main choke			
150 % overload (CT/ I_H , at 50 °C)			DX-LN3-006
Radio interference suppression filter (external, 150 %)			DX-EMC34-008
Radio interference suppression filter, low leakage currents (external, 150 %)			DX-EMC34-008-L
Note regarding radio interference suppression filter			Optional external radio interference suppression filter for longer motor cable lengths and for use in different EMC environments
DC link connection			
Braking resistance			
10 % duty factor (DF)			DX-BR400-0K4
20 % duty factor (DF)			DX-BR400-0K4
40 % duty factor (DF)			R:2 x DX-BR150-0K5
Notes concerning braking resistances:			R:m = "m" resistors connected in series The brake resistors are assigned based on the maximum rated power of the variable frequency drive. Additional brake resistors and designs (e.g. different duty cycles) are available upon request.
Motor feeder			
motor choke			
150 % overload (CT/ I_H , at 50 °C)			DX-LM3-008
Sine filter			
150 % overload (CT/ I_H , at 50 °C)			DX-SIN3-010
All-pole sine filter			
150 % overload (CT/ I_H , at 50 °C)			DX-SIN3-006-A

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	4.1
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	76.5
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	40
			Operation (with 150 % overload)
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			

10.2.2 Corrosion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Meets the product standard's requirements.
10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Frequency converter =< 1 kV (EC001857)		
Electric engineering, automation, process control engineering / Electrical drive / Static frequency converter / Static frequency converter = < 1 kV (ec@ss10.0.1-27-02-31-01 [AKE177014])		
Mains voltage	V	342 - 528
Mains frequency		50/60 Hz
Number of phases input		3
Number of phases output		3
Max. output frequency	Hz	500
Max. output voltage	V	500
Nominal output current I _{2N}	A	4.1
Max. output at quadratic load at rated output voltage	kW	1.5
Max. output at linear load at rated output voltage	kW	1.5
Relative symmetric net frequency tolerance	%	10
Relative symmetric net voltage tolerance	%	10
Number of analogue outputs		1
Number of analogue inputs		2
Number of digital outputs		1
Number of digital inputs		4
With control unit		Yes
Application in industrial area permitted		Yes
Application in domestic- and commercial area permitted		No
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		Yes
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		Yes
Supporting protocol for Data-Highway		No

Supporting protocol for DeviceNet			No
Supporting protocol for SUCONET			No
Supporting protocol for LON			No
Supporting protocol for PROFINET IO			No
Supporting protocol for PROFINET CBA			No
Supporting protocol for SERCOS			No
Supporting protocol for Foundation Fieldbus			No
Supporting protocol for EtherNet/IP			Yes
Supporting protocol for AS-Interface Safety at Work			No
Supporting protocol for DeviceNet Safety			No
Supporting protocol for INTERBUS-Safety			No
Supporting protocol for PROFIsafe			No
Supporting protocol for SafetyBUS p			No
Supporting protocol for BACnet			No
Supporting protocol for other bus systems			Yes
Number of HW-interfaces industrial Ethernet			0
Number of interfaces PROFINET			0
Number of HW-interfaces RS-232			0
Number of HW-interfaces RS-422			0
Number of HW-interfaces RS-485			1
Number of HW-interfaces serial TTY			0
Number of HW-interfaces USB			0
Number of HW-interfaces parallel			0
Number of HW-interfaces other			0
With optical interface			No
With PC connection			Yes
Integrated breaking resistance			Yes
4-quadrant operation possible			Yes
Type of converter			U converter
Degree of protection (IP)			IP66
Degree of protection (NEMA)			4X
Height		mm	257
Width		mm	188
Depth		mm	192

Approvals

Product Standards			UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking
UL File No.			E172143
UL Category Control No.			NMMS, NMMS7
CSA File No.			UL report applies to both US and Canada
North America Certification			UL listed, certified by UL for use in Canada
Specially designed for North America			No
Suitable for			Branch circuits
Max. Voltage Rating			3~ 480 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)
Degree of Protection			IEC: IP66

Dimensions

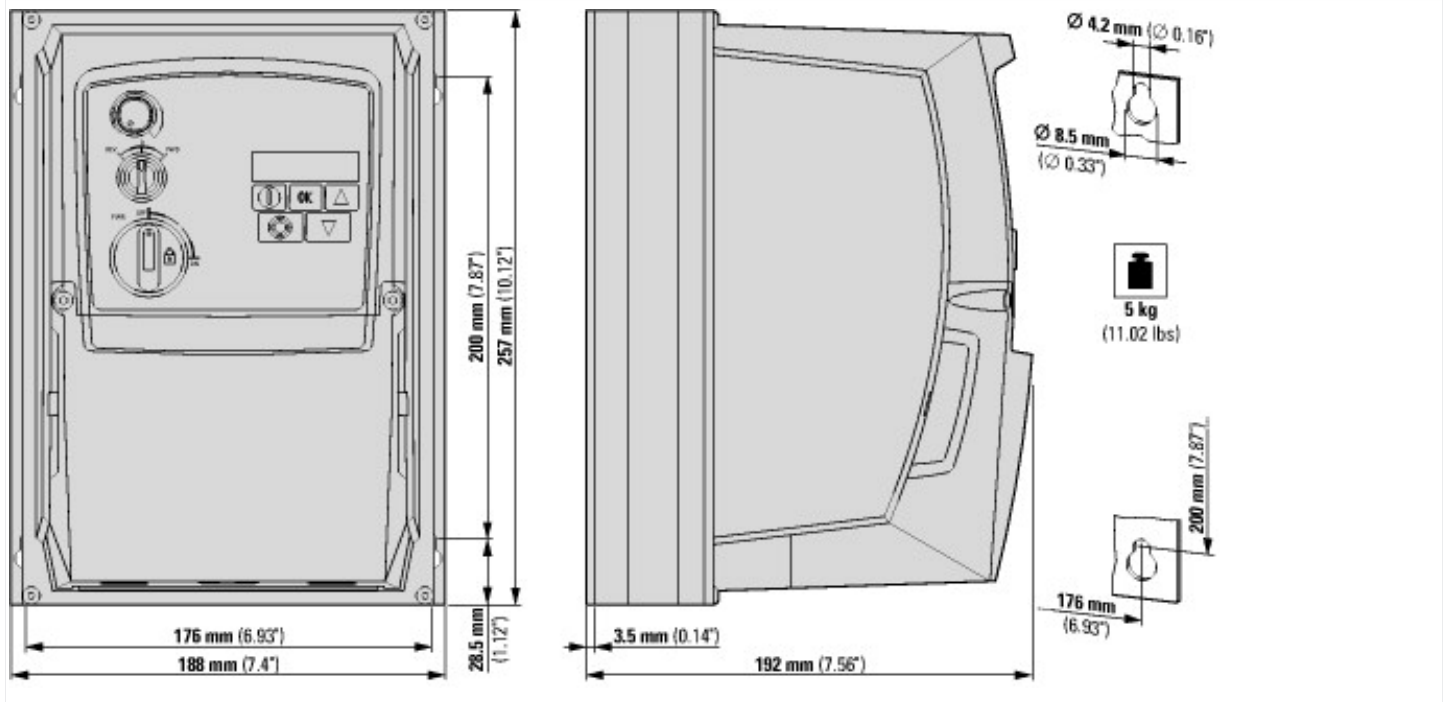

Additional product information (links)

IL04020013Z DC1 variable frequency drive (FS1 - FS3, IP66)	
IL04020013Z DC1 variable frequency drive (FS1 - FS3, IP66)	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL04020013Z2019_08.pdf
MN040023 DC1...E1 Installation manual	
MN040023 DC1...E1 Installationshandbuch - Deutsch	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_DE.pdf
MN040023 DC1...E1 Installation manual - English	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_EN.pdf
MN040023 DC1...E1 manuale Installazione - italiano	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_IT.pdf
MN040023 DC1...E1 podręcznik instalacji - polski	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_PL.pdf
MN040022 DC1...E1, Parameters manual	
MN040022 DC1...E1, Parameterhandbuch - Deutsch	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_DE.pdf
MN040022 DC1...E1, Parameters manual - English	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_EN.pdf
MN040022 DC1...E1, manuale Parametri - italiano	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_IT.pdf
MN040022 DC1...E1, podręcznik parametrów - polski	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_PL.pdf
CA04020001Z-EN Product Range Catalog: Efficient Engineering for Starting and Controlling Motors	http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238.pdf